


# Inner Container FB 900 EV PE 3 A Is

## For filling and/or discharge by steam sterilization

### Inlet / Outlet

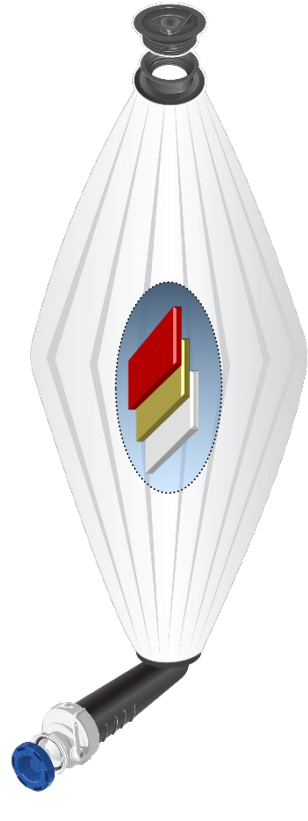


Bung Opening  
HDPE  
ø 95 mm



2" DIN 11851 (DN 50)  
dairy thread



### Inner Container Foils

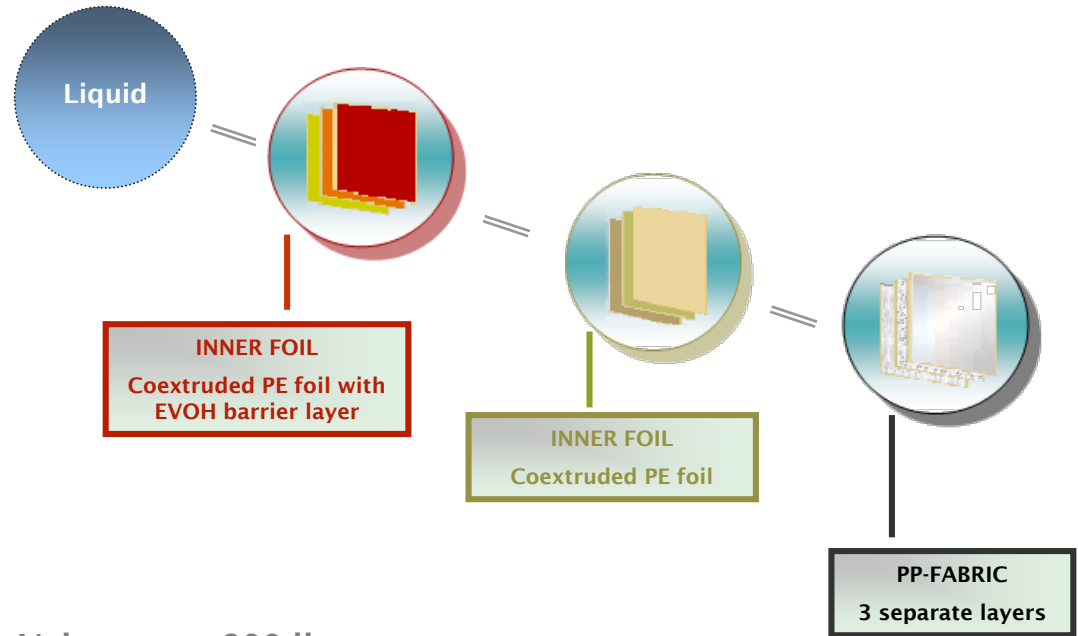

Volume: 900 liter  
Weight: ~3.6 kg

Inlets/outlets welded to the foils.

\*) EVOH = Barrier O2TR, guiding value 1-2 cc/m<sup>2</sup>/24 h (ASTM F-1927), WVT (water vapour transmission), value 0.7 g/m<sup>2</sup>/24h (ISO 17025 / DIN 53122-2).