

DRILCO



Impact Wrenches

More durable
More torque
Even lighter



SATA®

**MADE TO
CHALLENGE**




Twin hammer system:
Provides high torque output while reducing vibration



Exhaust parallel to cable: Directs debris and dust away from machine and operator



Variable speed trigger:
Gives control over RPM



Compact design

ST01111

COMPACT DESIGN

MAX. TORQUE

625 Nm

1/2" SQUARE DRIVE

1/4" AIR INTAKE

1/2" Square drive



4 Fixing screws



Speed regulator

Variable-speed trigger



Exhaust parallel to cable

1/4" Air intake



Technical Specifications

WORKING TORQUE	400 Nm
MAX. TORQUE	625 Nm
FREE ROTATION	10,000 RPM
WORKING PRESSURE	90 PSI, 6.35 kgf/cm ²
AIR CONSUMPTION (CFM)	4.7
WEIGHT (Kg)	1.5
HANDLE / HOUSING	Steel

Article Code	Description
ST01111	1/2" Air Impact Wrench

DRILCO

SATA®



Twin hammer system:
Provides high torque output while reducing vibration



Exhaust parallel to cable:
Directs debris and dust away from machine and operator



Variable speed trigger:
Gives control over RPM



Classic design

ST01113C

CLASSIC DESIGN

MAX. TORQUE

800 Nm

1/2" SQUARE DRIVE

1/4" AIR INTAKE





Technical Specifications

WORKING TORQUE	600 Nm
MAX. TORQUE	800 Nm
FREE ROTATION	7500 RPM
WORKING PRESSURE	90 PSI, 6.35 kgf/cm ²
AIR CONSUMPTION (CFM)	4.2
WEIGHT (Kg)	2.2
HANDLE / HOUSING	Steel


Article Code	Description
ST01113C	1/2" Air Impact Wrench

DRILCO

SATA®




Twin hammer system:
Provides high torque output while reducing vibration



Exhaust parallel to cable:
Directs debris and dust away from machine and operator



Variable speed trigger:
Gives control over RPM



Nylon + Fiberglass:
Solid fiberglass handle covered with a molded nylon jacket

ST01119

HEAVY PRO

MAX. TORQUE

1050 Nm

1/2" SQUARE DRIVE

1/4" AIR INTAKE





Technical Specifications

WORKING TORQUE	800 Nm
MAX. TORQUE	1050 Nm
FREE ROTATION	8500 RPM
WORKING PRESSURE	90 PSI, 6.35 kgf/cm ²
AIR CONSUMPTION (CFM)	4.8
WEIGHT (Kg)	2.2
HANDLE / HOUSING	Composite (Fiberglass + Nylon)

Article Code	Description
ST01119	1/2" Air Impact Wrench

DRILCO


SATA®



Shock resistant housing
with plastic protector



Ergonomic design:
10% lighter



9" (23 cm) rod:
Can be used for a wide
range of applications



Air line:
Does not need to be
removed for lubrication



45° air intake:
For better equipment
handling

ST01133SC

HEAVY PRO

MAX. TORQUE


4000 Nm

1"

SQUARE DRIVE

1/2"

AIR INTAKE

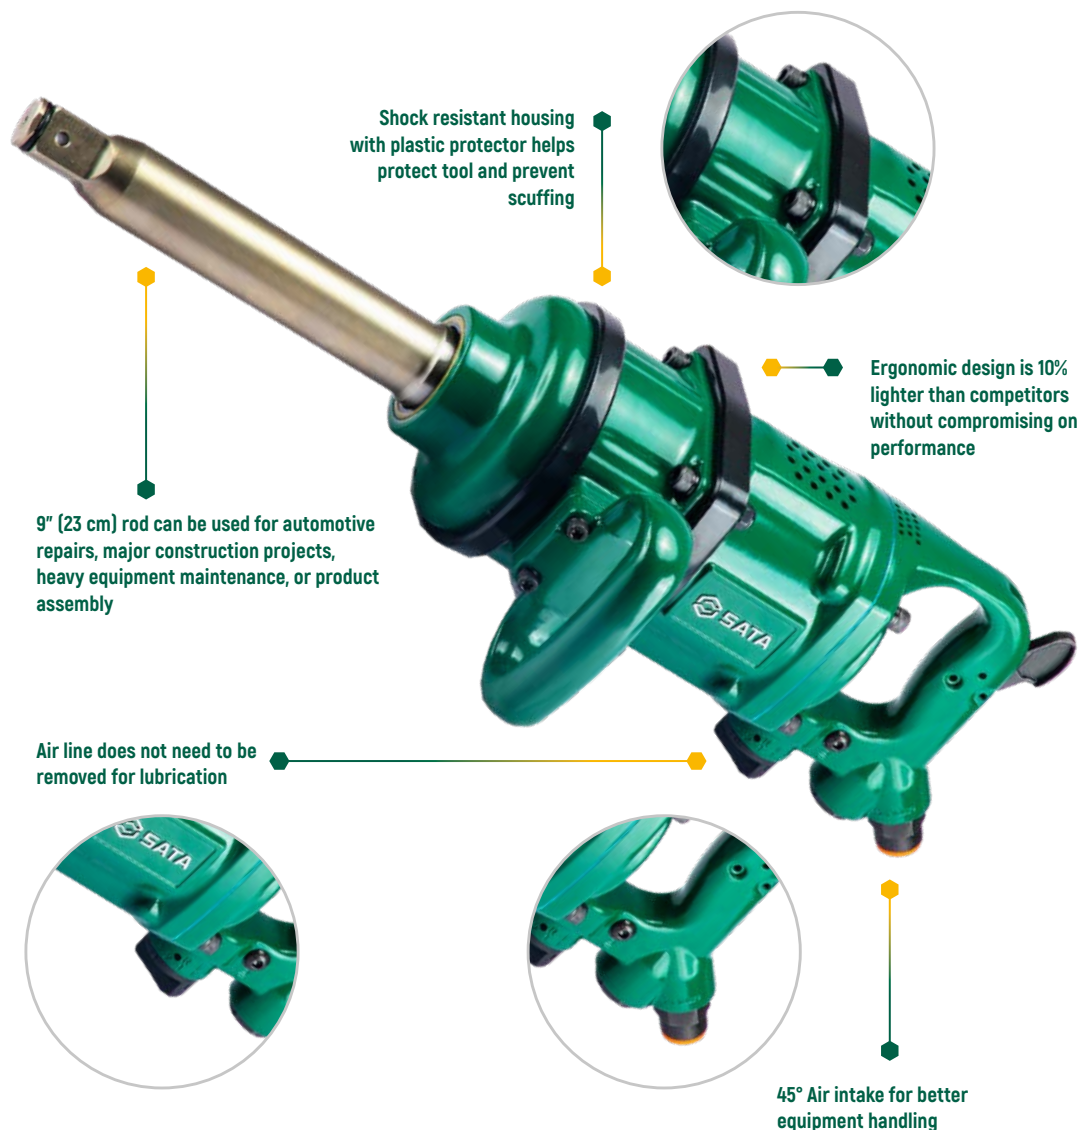

Technical Specifications

WORKING TORQUE	3000 Nm
MAX. TORQUE	4000 Nm
IDLE SPEED	4000 RPM
BOLT TIGHTENING TORQUE	M36
WORKING PRESSURE	110 PSI, 8 kgf/cm ²
AIR CONSUMPTION (CFM)	15
WEIGHT (Kg)	16.8
HANDLE / HOUSING	Steel

Article Code	Description
ST01133SC	1" Air Impact Wrench

DRILCO

SATA®

DRILCO

Avenida de Somosierra 22, E - 6 y 7
E-28703 S. S. de los Reyes (Madrid)
Tel. +34 916 591 900 · www.drilco.net

Authorized Distributor

Apex Tool Group B.V.
Phileas Foggstraat 16
7821 AK Emmen
The Netherlands
T. +31 (0) 591 667 504
www.satatools.eu

Disclaimer

Specifications subject to change without notice.
SATA is a registered trademark of Apex Brands, Inc. | © 2022
HT1090 100ST / 04.22 BO 1.0