



DRILCO



LEGEND

GENERIC

Accuracy (%)	Torque & Angle	Digital Display
Single Scale	Dual Scale	Multi Scale
Calibration Certificate	UKAS Accredited Certification	IP Rated
Bluetooth Enabled	Case Included	

SCREWDRIVERS & TORQUE WRENCHES

Ratchet	Torque Handle	Fixed
Adjustment Lock	Declaration of Conformance	Calibration Certificate
1/4" Hex Bit Holder		

MANUAL TORQUE MULTIPLIERS

Adjustable Reaction	Anti Wind-up Ratchet	
---------------------	----------------------	--

POWERED TORQUE TOOLS

Adjustable Reaction	2 Speed	Air Consumption - litres/sec
Lifting Attachment	Bi-Directional	

TORQUE MEASUREMENT INSTRUMENTS

Multi Transducers	Back-up Data	
-------------------	--------------	--

HARSH ENVIRONMENT INSTRUMENTS

Multi Transducers		
-------------------	--	--

ULTRASONIC MEASUREMENT

Back-up Data		
--------------	--	--

CUSTOMER RELATIONS

CONTACT DETAILS

New Sales

Direct Tel +44 (0)1295 753600

Email sales@norbar.com

After Sales Service

Tel +44 (0)1295 753635

Email service@norbar.com

Norbar Torque Tools Ltd

Wildmere Road, Banbury

Oxfordshire, OX16 3JU

UNITED KINGDOM

DRILCO

Avenida de Somosierra, 22E - 6 y 7
E-28703 S.S. de los Reyes (Madrid)
Tel. +34 916 591 900 · www.drilco.net

NORBAR SOCIAL MEDIA



Norbar Torque Tools Ltd



Norbar Torque Tools



@voiceoftorque



Norbar Torque Tools Ltd





Welcome to NORBAR



John Reynertson
Managing Director
Norbar Torque Tools

“From our humble beginnings over 80 years ago in a small workshop in North Bar, to our latest purpose-built factory on Wildmere Road, Norbar has pioneered many of today's solutions for torque control. Our offices around the world are excellent at taking core Banbury product and developing it for your use in your application. From manual torque wrenches to sophisticated control systems, we are still dedicated to being the best at what we do.

Norbar is now a member of the Snap-on Incorporated family of companies and is proud to be part of a business which has beliefs, values and a vision closely aligned with those that Norbar was founded on. We still strive to be "The best torque tool company in the world. Respected, profitable and a great place to work."

We have extended our product range this year by the addition of FASTORQ products and Sturtevant Richmont industrial tools to our group of highly respected professional brands. These companies expand our reach into connected manufacturing and bespoke engineered to order torque and tensioning products, enhancing our market leadership in these exciting, growing areas. **”**

FASTORQ is a preferred global provider of precision bolt loading and removal solutions. FASTORQ is a pioneer of the hydraulic tools industry and today designs, manufactures and sells an innovative line of bolting solutions including a complete line of hydraulic, electric and pneumatic tools, as well as design resources to customise existing tools or create one-of-a-kind bolting solutions.



From torque wrenches to torque screwdrivers, interchangeable heads for torque wrenches and the first torque analyzers and calibration instruments, Paul Sturtevant and Frank Livermont led the way. Sturtevant Richmont continues to shape the industry with game-changing innovation including the development of radio-equipped torque hand tools that connect to a process monitor.





GLOBAL SERVICE



United
Kingdom
+44 (0)1295 753600
sales@norbar.com



Australia
+61 (0)8 8292 9777
norbar@norbar.com.au



USA
+1 866 667 2272
inquiry@norbar.us



NVLAP Lab Code 200596-0



China
+86 21 6145 0368
sales@norbar.com.cn



中国认可
校准
CALIBRATION
CNAS L5729



India
+91 22 2778 8480
enquiry@norbar.in



FASTORQ
+1 281 449 6466
esales@fastorq.com



Sturtevant Richmont
+1 800 877 1347
customerservice@srtorque.com





We are the world's leading specialist in torque control and we are engaged solely in the design, development and production of torque tightening and measuring equipment.

We have distributors of our torque control products in more than 60 countries around the world.





TABLE OF CONTENTS



Torque Screwdrivers & Torque Wrenches 12

Versatile, accurate and easy torqueing



Electronic Torque Wrenches 30

An extensive range of high quality torque wrenches



HandTorque Multipliers 39

Multipliers that use a compact, epicyclic gearbox that accurately multiply the input torque provided by a torque wrench



Powered Torque Tools 48

A comprehensive range of electronic and pneumatic torque tools




Connected Tools 70

Systems designed to error-proof processes where highly customised products are assembled



Torque Measurement 73

Norbar's torque measuring instruments are renowned for high accuracy and superb reliability



Hydraulic Fixtures 100


The Hydraulic Tool Calibration Fixture is a robust device that allows accurate testing of hydraulic torque wrenches





Tool Controllers 104

Norbar's Tool Controllers are used in a range of industries and applications where a high degree of tool control, automation or data gathering is required.



Valve Testing 106

Norbar's Valve Testing System has been designed to monitor and control the opening and closing of ball valves and gate valves



Harsh Environment 108

Norbar's HE range is the ideal choice whenever it is necessary to apply or measure torque outdoors or in potentially wet or dusty conditions



Engineer To Order 112

As an ISO 9001 accredited company, Norbar will undertake the design and manufacture of special equipment against agreed customer specifications



Ultrasonic Measurement 117

The Delta Sigma has been both laboratory and field-proven to be highly accurate, reliable and a cost-effective solution for eliminating bolting failures



Calibration Beams & Weights 120

Designed to remove potential sources of measurement error, these beams can be used to calibrate transducers and mechanical test devices



Spares Kits 125

In order to maintain the quality, performance and peace of mind associated with our products Norbar recommend that only genuine Norbar spares are fitted to our products



Calibration Services 130

Users of torque equipment all over the world are realising the importance of calibration in maintaining traceability and quality of operations. Norbar's UKAS accredited laboratory is one of the finest in the world



INTRODUCTION TO TORQUE


What is Torque?

Torque is any force or system of forces that tends to cause rotation about an axis.

Measurement of Torque

Imagine someone tightening a bolt using a socket attached to a meter (m) long bar. If they apply 10 kg of force (kgf) perpendicular to the bar they will produce a torque of 10 kgf·m at the axis (the centre of the bolt).

However, under the S.I. system of measurement, force is expressed in Newtons (N) rather than kgf. The conversion between kgf and N is $x 9.807$ so the person is applying 98.07 N·m of torque.

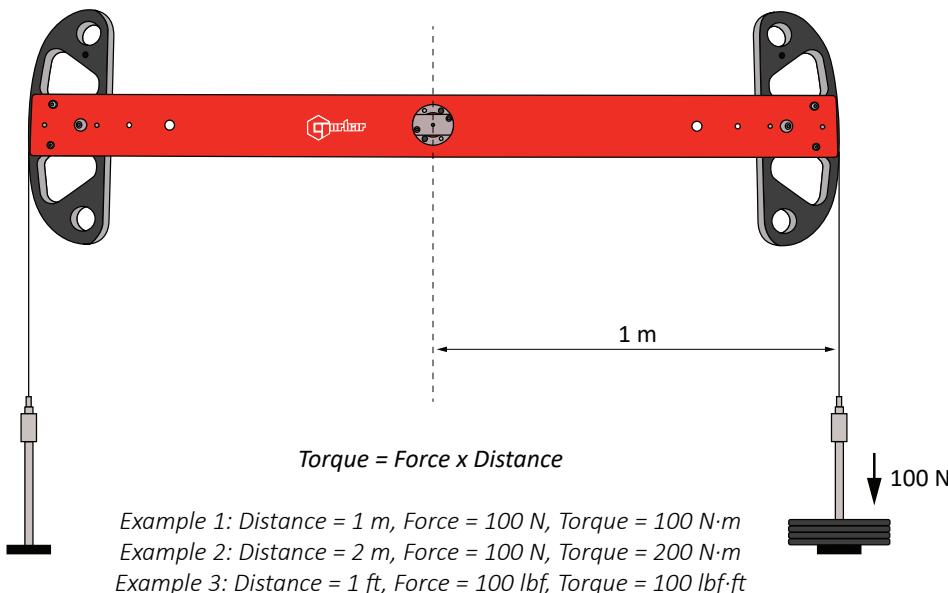

The Importance of Torque Control


Although many methods exist to join two or more parts together, the ease of assembly and disassembly provided by threaded fasteners make them the ideal choice for many applications.

The object of a threaded fastener is to clamp parts together with a tension greater than the external forces tending to separate them. The bolt then remains under constant stress and is immune from fatigue. However, if the initial tension is too low, varying loads act on the bolt and it will quickly fail. If the initial tension is too high, the tightening process may cause bolt failure. Reliability therefore depends upon correct initial tension. The most practical way of ensuring this is by specifying and controlling the tightening torque.

Bolt Tension

When an assembly is clamped by tightening a nut and bolt, the induced tension causes the bolt to stretch. An equal force acts to compress the parts which are thus clamped.

The proof load of a bolt, normally established by test, is the load which just starts to induce permanent set – also known as the yield point. Typically bolts are tightened to between 75% and 90% of yield.

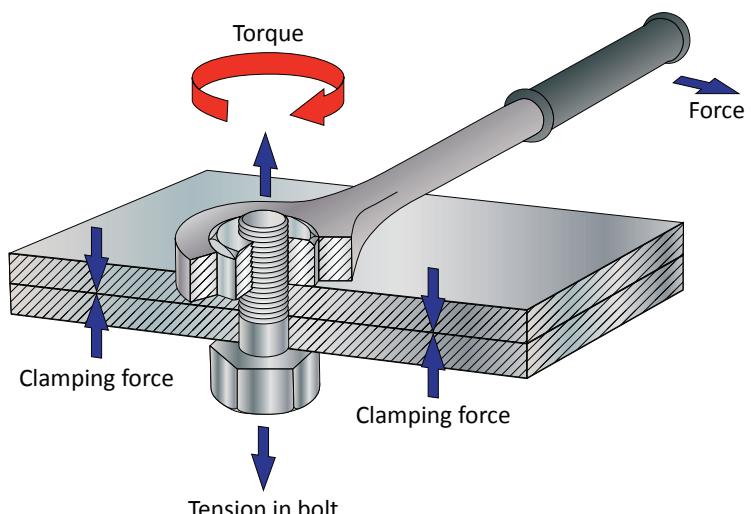




INTRODUCTION TO TORQUE

Friction in the Bolted Joint

When a threaded fastener is tightened, the induced tension results in friction under the head of the bolt and in the threads. It is generally accepted that as much as 50% of the applied torque is expended in overcoming friction between the bolt head and the abutting surface and another 30% to 40% is lost to friction in the threads. As little as 10% of the applied torque results in useful work to tension the bolt.

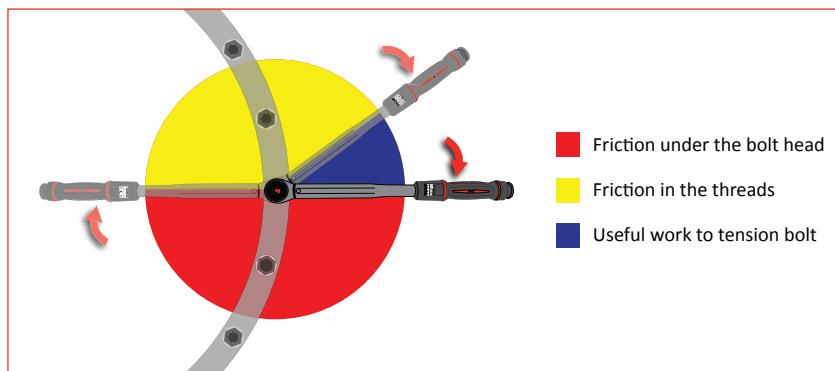

Given that up to 90% of the applied torque will be lost to friction, it follows that any changes in the coefficient of friction resulting from differences in surface finish, surface condition and lubrication can have a dramatic effect on the torque versus tension relationship. Some general points can be made:

- Most torque tightened joints do not use washers because their use can result in relative motion between the nut and washer or the washer and joint surface during tightening. This has the effect of changing the friction radius and hence affects the torque-tension relationship. Where a larger bearing face is required then flange nuts or bolts can be used. If washers are to be used, hard washers with a good fit to the shank of the bolt give lower and more consistent friction and are generally to be preferred.
- Degreasing fasteners of the film of oil usually present on them as supplied will decrease the tension for a given torque and may result in shear of the fastener before the desired tension is achieved.
- Super lubricants formulated from graphite, molybdenum disulphide and waxes result in minimal friction. Unless allowance is made in the specified tightening torque, the induced tension may be excessive causing the bolt to yield and fail. However, used in a controlled manner, these lubricants serve a useful purpose in reducing the torque to produce the desired tension meaning that a lower capacity tightening tool can be used.
- For reasons of appearance or corrosion resistance, fasteners may be plated. These treatments affect the coefficient of friction and therefore the torque versus tension relationship.
- Friction is often deliberately introduced into the fastener to reduce the possibility of loosening due to vibration. Devices such as lock-nuts must be taken into account when establishing the correct tightening torque.

As a rough guide, the calculated tightening torque should be multiplied by the factor from the table below according to surface treatment and lubrication.

		Surface Condition of Bolt			
		Untreated	Zinc	Cadmium	Phosphate
Surface Condition of Nut	Untreated	1.00	1.00	0.80	0.90
	Zinc	1.15	1.20	1.35	1.15
	Cadmium	0.85	0.90	1.20	1.00
	Phosphate and oil	0.70	0.65	0.70	0.75
	Zinc with wax	0.60	0.55	0.65	0.55



INTRODUCTION

INTRODUCTION TO TORQUE

Tightening to Yield

Bolts tightened to yield provide consistently higher preloads from smaller diameter bolts. The reduced fastener stiffness reduces the fatigue loading to which the bolt is subjected under repeated external load reversals, e.g. cylinder heads and connecting rods.

In theory, a bolt tightened to its yield point will provide the strongest and most fatigue-resistant joint possible, within the physical limitations of the bolt material and manufacturing process.

The downside of this method is the cost of the sophisticated equipment necessary to determine when the bolt goes into yield.

Torque Tension Calculator

For further information and guidance on establishing the correct tightening torque for a fastener, see Norbar's web based calculator, www.norbar.com/Support/Calculators/Torque-Tension-Calculator



Calculated Maximum Torque

N.m.: 0.05	Calculated Maximum Load
Ibf. ft.: 0.04	kN: 0.15
Ibf. lb.: 34.7	

Bolt Properties

Bolt Diameter	1.6 mm
Yield Stress	180 N/mm ²
Pitch	0.35 mm
Pitch Diameter	1.373 mm
Root Diameter	1.171 mm
Hex A/f Diameter	3.2 mm

Standard Parameters

Bolt Type	Metric Coarse
Bolt Dia.	1.6
Grade	3.6

Friction Coefficients


Thread	0.14
Head	0.14
Defaults	

These torque and load values are for guidance only! Always check with equipment/bolt manufacturer

When Torque Doesn't Equal Tight

As we have established, it is the tension in a fastener rather than the torque that is the critical factor. Torque is an indirect means of establishing tension and in a correctly engineered joint and with a controlled tightening process, it is a satisfactory method under the majority of circumstances.

However, in joints that are highly critical due to safety or the cost and implications of machine down-time, a more direct means of establishing tension is needed. Various methods exist including several types of load indicating bolts or washers. However, one of the most versatile methods is to measure the extension of the bolt due to the tightening process using ultrasound.

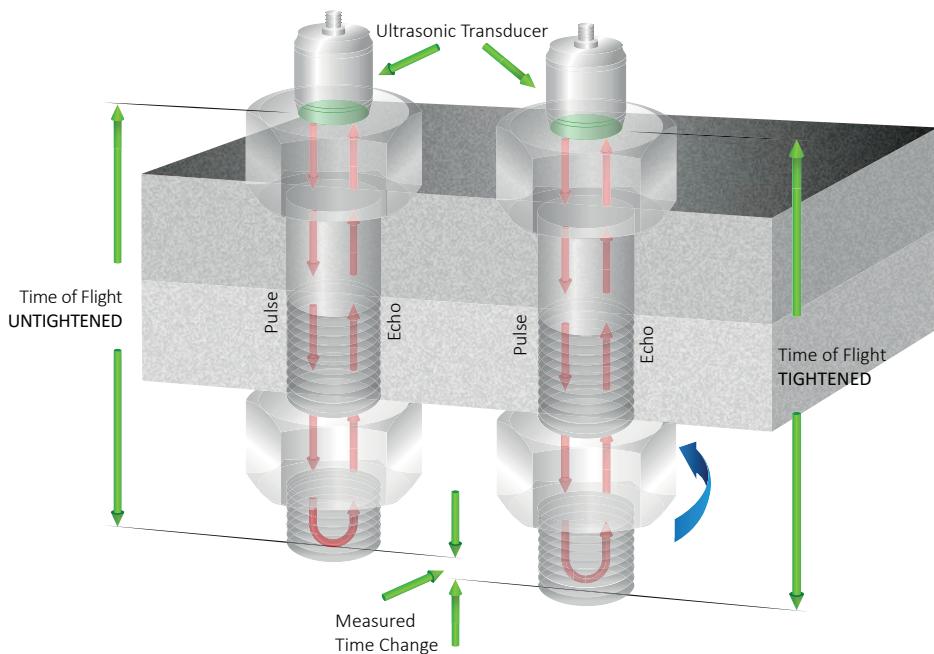



INTRODUCTION TO TORQUE

Recommended Maximum Torque Values

The information supplied here is intended to be an acceptable guide for normal conditions. For critical applications, further information and research will be necessary. The following basic assumptions have been made:

- Bolts are new, standard finish, uncoated and not lubricated (other than the normal protective oil film)
- The load will be 90% of the bolt yield strength
- The coefficient of friction is 0.14
- The final tightening sequence is achieved smoothly and slowly

If lubrication is to be applied to the nut/bolt, multiply the recommended torque by the appropriate factor shown in the table on page 8. Alternatively, use the Torque/Tension Calculator on the Norbar website (shown on page 9) which enables fastener and friction conditions to be modified with ease.

	BOLT GRADE									mm
	3.6	4.6	5.6	5.8	6.8	8.8	9.8	10.9	12.9	
	Torque in N·m									
M 1.6	0.05	0.07	0.09	0.11	0.14	0.18	0.21	0.26	0.31	3.2
M 2	0.11	0.14	0.18	0.24	0.28	0.38	0.42	0.53	0.63	4
M 2.5	0.22	0.29	0.36	0.48	0.58	0.78	0.87	1.09	1.31	5
M 3	0.38	0.51	0.63	0.84	1.01	1.35	1.52	1.9	2.27	5.5
M 4	0.71	0.95	1.19	1.59	1.91	2.54	2.86	3.57	4.29	7
M 5	1.71	2.28	2.85	3.8	4.56	6.09	6.85	8.56	10.3	8
M 6	2.94	3.92	4.91	6.54	7.85	10.5	11.8	14.7	17.7	10
M 8	7.11	9.48	11.9	15.8	19	25.3	28.4	35.5	42.7	13
M 10	14.3	19.1	23.8	31.8	38.1	50.8	57.2	71.5	85.8	17
M 12	24.4	32.6	40.7	54.3	65.1	86.9	97.9	122	147	19
M 14	39	52	65	86.6	104	139	156	195	234	22
M 16	59.9	79.9	99.8	133	160	213	240	299	359	24
M 18	82.5	110	138	183	220	293	330	413	495	27
M 20	117	156	195	260	312	416	468	585	702	30
M 22	158	211	264	352	422	563	634	792	950	32
M 24	202	270	337	449	539	719	809	1,011	1,213	36
M 27	298	398	497	663	795	1,060	1,193	1,491	1,789	41
M 30	405	540	675	900	1,080	1,440	1,620	2,025	2,430	46
M 33	550	734	917	1,223	1,467	1,956	2,201	2,751	3,301	50
M 36	708	944	1,180	1,573	1,888	2,517	2,832	3,540	4,248	55
M 39	919	1,226	1,532	2,043	2,452	3,269	3,678	4,597	5,517	60
M 42	1,139	1,518	1,898	2,530	3,036	4,049	4,555	5,693	6,832	65
M 45	1,425	1,900	2,375	3,167	3,800	5,067	5,701	7,126	8,551	70
M 48	1,716	2,288	2,860	3,813	4,576	6,101	6,864	8,580	10,296	75
M 52	2,210	2,947	3,684	4,912	5,895	7,859	8,842	11,052	13,263	80
M 56	2,737	3,650	4,562	6,083	7,300	9,733	10,950	13,687	16,425	85
M 60	3,404	4,538	5,673	7,564	9,076	12,102	13,614	17,018	20,422	90
M 64	4,100	5,466	6,833	9,110	10,932	14,576	16,398	20,498	24,597	95
M 68	4,963	6,617	8,271	11,029	13,234	17,646	19,851	24,814	29,777	100



INTRODUCTION

INTRODUCTION TO TORQUE

Torque Conversion Factors

Units to be converted	S.I. Units		Imperial Units			Metric Units	
	cN·m	N·m	ozf·in	lbf·in	lbf·ft	kgf·cm	kgf·m
1 cN·m =	1	0.01	1.416	0.088	0.007	0.102	0.001
1 N·m =	100	1	141.6	8.851	0.738	10.20	0.102
1 ozf·in =	0.706	0.007	1	0.0625	0.005	0.072	0.0007
1 lbf·in =	11.3	0.113	16	1	0.083	1.152	0.0115
1 lbf·ft =	135.6	1.356	192	12	1	13.83	0.138
1 kgf·cm =	9.807	0.098	13.89	0.868	0.072	1	0.01
1 kgf·m =	980.7	9.807	1389	86.8	7.233	100	1

$$\begin{aligned} \text{FORCE} \\ \text{lbf} \times 4.45 = \text{N} \\ \text{N} \times 0.225 = \text{lbf} \end{aligned}$$

$$\begin{aligned} \text{FLOW} \\ \text{l/s} \times 2.119 = \text{cu·ft/min} \\ \text{cu·ft/min} \times 0.472 = \text{l/s} \end{aligned}$$

$$\begin{aligned} \text{PRESSURE} \\ \text{lbf/in}^2 \times 0.069 = \text{bar} \\ \text{bar} \times 14.504 = \text{lbf/in}^2 \end{aligned}$$

$$\begin{aligned} \text{POWER} \\ \text{hp} \times 0.746 = \text{kW} \\ \text{kW} = \frac{\text{N} \cdot \text{m} \times \text{rev/min}}{9,546} \end{aligned}$$

Formulae

Accepted formulae relating torque and tension, based on many tests are:-

For Imperial Sizes

$$M = \frac{P \times D}{60}$$

M = torque lbf·ft
P = bolt tension lbf
D = bolt diameter (ins)

For Metric Sizes

$$M = \frac{P \times D}{5000}$$

M = torque N·m
P = bolt tension Newtons
D = bolt diameter (mm)

These formulae may be used for bolts outside the range of the tables.

Formula for Calculating the Effect of Torque Wrench Extensions

$$M_1 = M_2 \times L_1/L_2$$


Where L1 is the normal length and L2 is the extended length, M1 is the set torque and M2 the actual torque applied to the nut.

Example

The required torque on the fastener is 130 N·m (M2) but what do you set on the torque wrench scale?

$$\begin{aligned} L_1 = 500 & \quad L_2 = 650 \\ (\text{units of length not important, this is ratio}) \end{aligned}$$

$$\begin{aligned} M_1 = 130 \times 500/650 \\ M_1 = 100 \end{aligned}$$

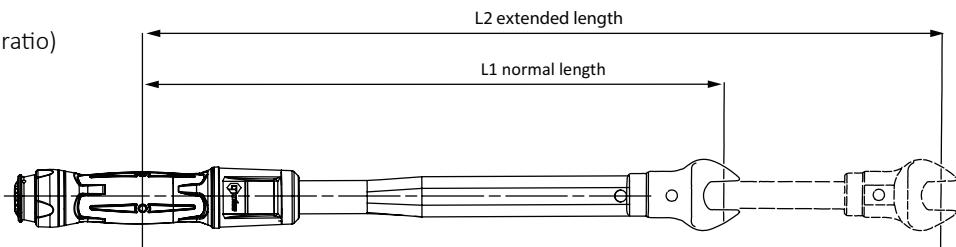

For further information and guidance on converting torque and calculating the effect of torque wrench extensions download our purpose-built applications for iPhone and Android.



TORQUE SCREWDRIVERS AND TORQUE WRENCHES

DRILCO

Torque Screwdrivers	13
Professional Torque Wrenches Model 5	13
Slimline™ Torque Wrenches	14
TT Torque Wrenches	15
TTi Non-Magnetic Torque Wrenches	16
NorTorque® Tethered Torque Wrenches - for working at height	16
NorTorque®	17
Professional 'P' Type Torque Wrenches	19
Professional Torque Wrenches	21
Professional Torque Wrenches NLD Series	25
Industrial Torque Wrenches Adjustable & 'P' Type - New Generation	27
Industrial Torque Wrench - Bi-Square	29
Electrode Wrenches	29

Norbar Torque Tools manufacture an extensive range of high quality torque screwdrivers and torque wrenches to cover torque values from 0.3 N·m to 2,000 N·m. They are designed and manufactured to exceed international standards for accuracy.

In addition to the normal 'adjustable' torque wrenches, Norbar offer Production 'P' Type versions which can be pre-set and dedicated to a particular application. This setting system is designed to discourage unauthorised alteration.



SCREWDRIVERS AND TORQUE WRENCHES


TORQUE SCREWDRIVERS



Versatile, accurate and easy torqueing for smaller fasteners and restricted spaces

- Accuracy to $\pm 6\%$ meets the requirements of ISO 6789-1:2017
- Supplied with $\frac{1}{4}$ " hexagon bit holder
- Single scale, either N·m or lbf·in

NOTE: Bit set is only sold separately or as part of kit - see website for bit set details

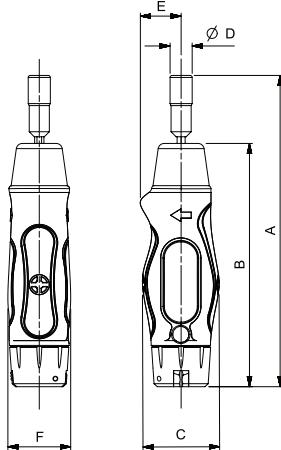

MODEL	ALL MODELS
Dimensions (mm)	A 155
	B 121
	C 38
	$\varnothing D$ 11
	E 20
	F 31
Weight (kg)	0.2

2 ADJUSTABLE N·m

13850	TTs1.5, $\frac{1}{4}$ ", 0.3 - 1.5 N·m
13851	TTs3.0, $\frac{1}{4}$ ", 0.6 - 3 N·m
13852	TTs6.0, $\frac{1}{4}$ ", 1.2 - 6 N·m

2 ADJUSTABLE lbf·in

13853	TTs13, $\frac{1}{4}$ ", 2.5 - 13 lbf·in
13854	TTs26, $\frac{1}{4}$ ", 5 - 26 lbf·in
13855	TTs53, $\frac{1}{4}$ ", 10 - 53 lbf·in

2 PRODUCTION 'P' TYPE

13856	TTs1.5, $\frac{1}{4}$ ", 0.3 - 1.5 N·m, 2.5 - 13 lbf·in
13857	TTs3.0, $\frac{1}{4}$ ", 0.6 - 3 N·m, 5 - 26 lbf·in
13858	TTs6.0, $\frac{1}{4}$ ", 1.2 - 6 N·m, 10 - 53 lbf·in
SQ2222	Pre-set, etch and certify (Allow 3 days delivery for this service)

2 ADJUSTABLE N·m KIT

13700	TTs0.3 - 1.5 N·m Kit with 12 piece bit set and case
13701	TTs0.6 - 3 N·m Kit with 12 piece bit set and case
13702	TTs1.2 - 6 N·m Kit with 12 piece bit set and case
28937	12 Piece $\frac{1}{4}$ ", Hex bit set

PROFESSIONAL TORQUE WRENCHES MODEL 5




The Model 5 is a unique torque wrench that offers the convenience of interchangeable $\frac{1}{4}$ " hexagon bits.
(ISO 1173:2001 Form C drive bits).

- Accuracy meets the requirements of ISO 6789-1:2017
- Non-length dependent. The Model 5 remains accurate regardless of hand position
- Supplied in a storage case. The case allows space for the storage of additional drive bits

2 ADJUSTABLE

13001	Pro 5, $\frac{1}{4}$ " female hex, 1 - 5 N·m
13002	Pro 5, $\frac{1}{4}$ " female hex, 10 - 50 lbf·in
13003	Pro 5, $\frac{1}{4}$ " female hex, 10 - 50 kgf·cm

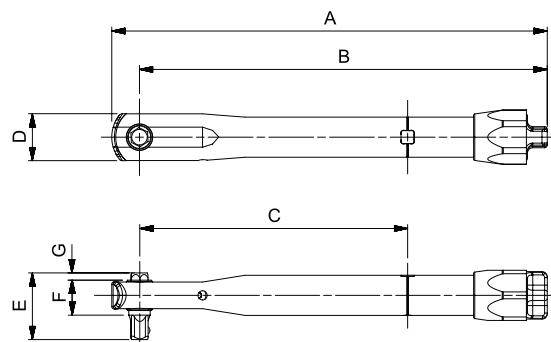

Also available as Production 'P' Types, preventing unauthorised alteration of torque setting. No external calibration equipment is required to set the Model 5 'P' Type.

2 PRODUCTION 'P' TYPE

13004	Pro 5, $\frac{1}{4}$ " female hex, 1 - 5 N·m
13005	Pro 5, $\frac{1}{4}$ " female hex, 10 - 50 lbf·in
13006	Pro 5, $\frac{1}{4}$ " female hex, 10 - 50 kgf·cm

8 MODEL 5 SPARES

28900	$\frac{1}{4}$ " Hex to $\frac{1}{4}$ " male square drive
-------	--



Model 5 'P' Type in storage case

Model	Adjustable	'P' Type
Part Number	13001	13004
	13002	13005
	13003	13006
Dimensions (mm)	A	165
	B	155
	C	102
	D	18
	E	25
	F	13
	G	2.8
Weight (kg)	0.1	0.1



SLIMLINE™ TORQUE WRENCHES



- Accurate to $\pm 3\%$ of reading which meets the requirements of ISO 6789-1:2017
- Unmistakable signal when set torque is reached
- High quality 72 tooth ratchet allows use in confined spaces
- Fixed head version has a push-through square for left and right handed torque tightening
- Moulded grip aids correct hand location and operator comfort

2 ADJUSTABLE RATCHET - DUAL SCALE

11123	SLO, $\frac{1}{4}$ ", 4 - 20 N·m, 40 - 180 lbf·in
11087	SLO, $\frac{3}{8}$ ", 4 - 20 N·m, 40 - 180 lbf·in





2 ADJUSTABLE - FIXED HEAD- DUAL SCALE

SLO, $\frac{3}{8}$ " Fixed Head, 4 - 20 N·m, 40 - 180 lbf·in


SLO Ratchet

Model	SLO $\frac{1}{4}$ "	SLO $\frac{3}{8}$ "
Part Number	11123 11085	11087 11086
A	219	219
B	204	204
C	146	146
$\varnothing D$	30	30
E	26	26
F	19	19
Weight (kg)	0.4	0.4

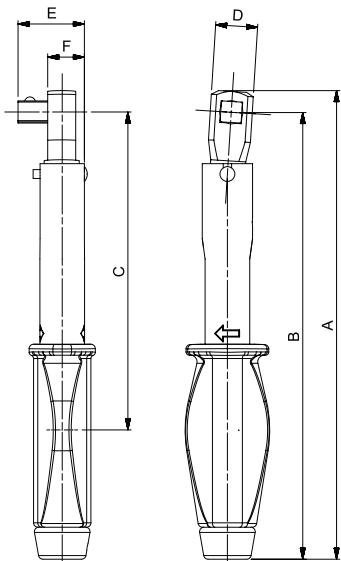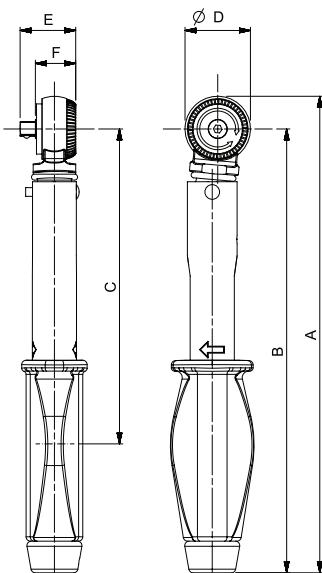

SLO Fixed Head

Model	SLO $\frac{3}{8}$ " Fixed Head
Part Number	11125 11089
A	213
B	203
C	145
D	19
E	30
F	17
Weight (kg)	0.4

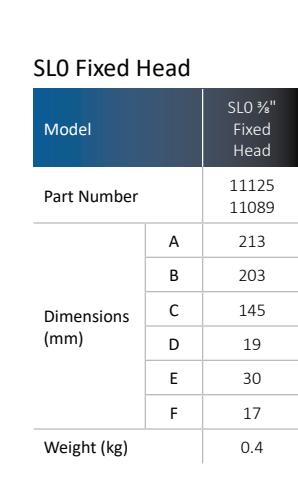

2 TORQUE HANDLE ADJUSTABLE - DUAL SCALE

11126 SLO 16 mm spigot, 4 - 20 N·m, 40 - 180 lbf·in

11122 SLO 9 x 12 mm female, 4 - 20 N·m, 40 - 180 lbf·in

Production 'P' type versions are designed to discourage unauthorised alteration. They have no scale and so must be set against a torque measuring device such as Norbar's TruCheck™ 2 - see page 76.



2 PRODUCTION 'P' TYPE

(Must be set using a Torque Tester, see pages 76 - 83)

11089 SLO, $\frac{3}{8}$ " Fixed Head, 1 - 20 N·m, 10 - 180 lbf·in11085 SLO, $\frac{1}{4}$ ", 1 - 20 N·m, 10 - 180 lbf·in11086 SLO, $\frac{3}{8}$ ", 1 - 20 N·m, 10 - 180 lbf·in



11090 SLO, 16 mm spigot, 1 - 20 N·m, 10 - 180 lbf·in

11088 SLO, 9 x 12 mm female, 1 - 20 N·m, 10 - 180 lbf·in

SQ2222 Pre-set, etch and certify
(Allow 3 days delivery for this service)

SLO Female Torque Handle

Model	SLO FTH
Part Number	11122 11088
A	205
B	194
C	135
D	22
E	20
Weight (kg)	0.4

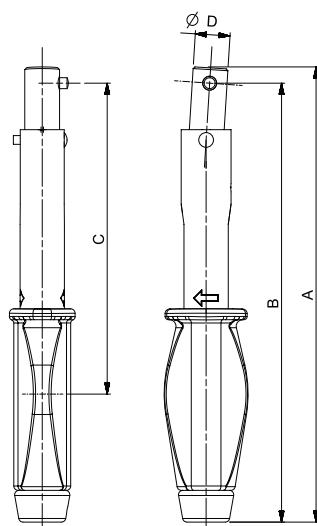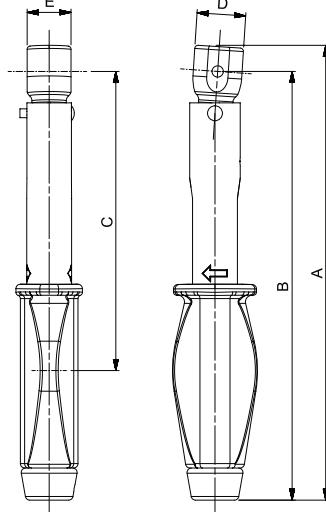

SLO Spigot Torque Handle

Model	SLO Spigot
Part Number	11126 11090
A	206
B	199
C	143
$\varnothing D$	16
Weight (kg)	0.4



SCREWDRIVERS AND TORQUE WRENCHES

TT TORQUE WRENCHES




For no-nonsense torqueing - comfortable, accurate and easy to use

- Accurate to $\pm 3\%$ of reading which meets the requirements of ISO 6789-1:2017
- Micrometer scale for simple and error free setting
- All models feature a lock to prevent accidental adjustment of the set torque
- Handle and lens materials resistant to commonly used industrial chemicals



TTi Ratchet / Non-Magnetic

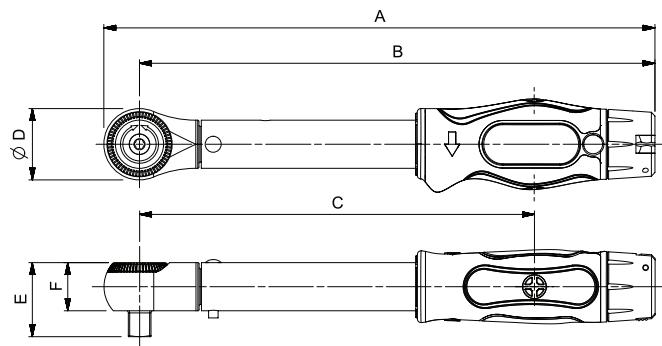

Model	TT Torque Wrenches / Non-Magnetic				
	TTi20 TTi15	TTi50 TTi35	TTf20 TTf15	TTfth20	TTfth50
Part Number	13830, 13831, 13832, 13833, 13834, 13835, 13900, 13901, 130503, 130504	13841, 13842, 13843, 13844, 13845, 13846, 13902, 13903, 13906, 13907	13836 13837 13838	13839 13840	13847 13848
Dimensions (mm)	A 232	B 328	C 225	D 214	E 310
	F 217				
	C 166	B 263	A 166	E 153	F 250
	D 30	E 30	F 20	G 22	H 22
	H 31	I 31	J 28	K 17	L 17
	M 20	N 20	O 18	P N/A	Q N/A
Weight (kg)	0.5	0.7	0.5	0.4	0.6

2 RATCHET ADJUSTABLE - DUAL SCALE

13830	TTi20, $\frac{1}{4}$ ", 4 - 20 N·m, 35 - 180 lbf·in
13831	TTi20, $\frac{3}{8}$ ", 4 - 20 N·m, 35 - 180 lbf·in
13841	TTi50, $\frac{3}{8}$ ", 10 - 50 N·m, 8 - 35 lbf·ft
13842	TTi50, $\frac{1}{2}$ ", 10 - 50 N·m, 8 - 35 lbf·ft

2 RATCHET ADJUSTABLE - N·m ONLY

13832	TTi20, $\frac{1}{4}$ ", 4 - 20 N·m
13833	TTi20, $\frac{3}{8}$ ", 4 - 20 N·m
13843	TTi50, $\frac{3}{8}$ ", 10 - 50 N·m
13844	TTi50, $\frac{1}{2}$ ", 10 - 50 N·m

2 RATCHET ADJUSTABLE - lbf·ft ONLY

13834	TTi15, $\frac{1}{4}$ ", 35 - 180 lbf·in
13835	TTi15, $\frac{3}{8}$ ", 35 - 180 lbf·in
13845	TTi35, $\frac{3}{8}$ ", 8 - 35 lbf·ft
13846	TTi35, $\frac{1}{2}$ ", 8 - 35 lbf·ft


2 FIXED HEAD ADJUSTABLE

13836	TTf 20, $\frac{3}{8}$ ", 4 - 20 N·m, 35 - 180 lbf·in
13837	TTf 20, $\frac{3}{8}$ ", 4 - 20 N·m (N·m ONLY)
13838	TTf 15, $\frac{3}{8}$ ", 35 - 180 lbf·in (lbf·in ONLY)


2 FEMALE TORQUE HANDLE ADJUSTABLE

13839	TTfth 20, 9 x 12 mm, 4 - 20 N·m, 35 - 180 lbf·in
13847	TTfth 50, 9 x 12 mm, 10 - 50 N·m, 8 - 35 lbf·ft
13840	TTfth 20, 9 x 12 mm, 4 - 20 N·m (N·m ONLY)
13848	TTfth 50, 9 x 12 mm, 10 - 50 N·m (N·m ONLY)

TTf Fixed Head

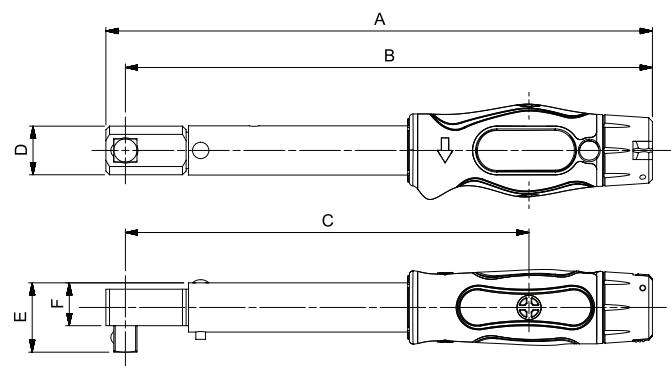

TTfth Female Torque Handle

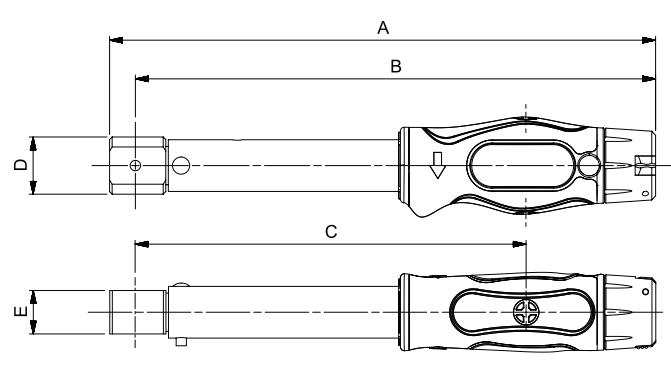



TTI NON-MAGNETIC TORQUE WRENCHES



Carefully selected and tested materials replace the ferrous components present in standard torque wrenches, thereby giving an extremely low magnetic footprint. Being based on the TT range of torque wrenches means that they also retain the high standards of Norbar's other torque wrenches. Perfect for MRI scanner applications.



TTi50 tightening a pedal crank of a bicycle

4	ADJUSTABLE - DUAL SCALE
13900	TTi20, $\frac{3}{8}$ " Non-Mag, 4 - 20 N·m, 35 - 180 lbf-in
13901	TTi20, $\frac{1}{2}$ " Non-Mag, 4 - 20 N·m, 35 - 180 lbf-in
13902	TTi50, $\frac{3}{8}$ " Non-Mag, 10 - 50 N·m, 8 - 35 lbf-ft
13903	TTi50, $\frac{1}{2}$ " Non-Mag, 10 - 50 N·m, 8 - 35 lbf-ft

4	ADJUSTABLE - N·m ONLY
130503	TTi20, $\frac{3}{8}$ " Non-Mag, 3 - 20 N·m
130504	TTi20, $\frac{1}{2}$ " Non-Mag, 3 - 20 N·m
13906	TTi50, $\frac{3}{8}$ " Non-Mag, 10 - 50 N·m
13907	TTi50, $\frac{1}{2}$ " Non-Mag, 10 - 50 N·m



TTi20 Non-Magnetic in application on an MRI Scanner

NORTORQUE® TETHERED TORQUE WRENCHES - FOR WORKING AT HEIGHT




Features inbuilt tethering point to secure the tool for safe work at height and double-sided locking plunger square

- Pinned head in line with DROPS recommendation for ultra safe handling of sockets when working at height
- Built on a trusted, versatile torque wrench design
- Accurate to $\pm 3\%$ of reading which meets the requirements of ISO 6789-1:2017
- Light and fast adjustment saves operator time and effort
- Micrometer scale for simple and error free setting
- Lock feature helps prevent accidental adjustment of the set torque
- Convenient hanger feature for tool storage also aids wrench unlocking and adjustment

2	RATCHET ADJUSTABLE - DUAL SCALE
130178	Model 100, $\frac{1}{2}$ ", 20 - 100 N·m, 20 - 80 lbf-ft
130179	Model 200, $\frac{1}{2}$ ", 40 - 200 N·m, 30 - 150 lbf-ft
130180	Model 300, $\frac{1}{2}$ ", 60 - 300 N·m, 45 - 220 lbf-ft

Model	NorTorque Tethered Torque Wrenches		
	Model 100	Model 200	Model 300
Part Number	130178	130179	130180
Dimensions (mm)	A	375	459
	B	354	437
	C	252	335
	ØD	42	45
	E	53	59
	F	22	28
	G	16	16
Weight (kg)	0.9	1.1	1.5

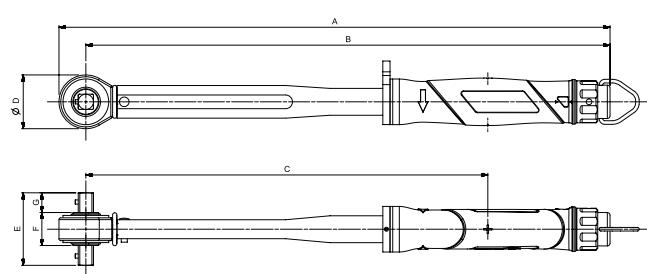



SCREWDRIVERS AND TORQUE WRENCHES

NORTORQUE®



The NorTorque® utilises Norbar's proven mechanism and internal components and incorporates them into a purposeful and attractive torque wrench that will delight a wide range of users from professional mechanics to hobby enthusiasts

- Accurate to $\pm 3\%$ of reading which meets the requirements of ISO 6789-1:2017
- Light and fast adjustment saves operator time and effort
- Micrometer scale applying to the primary torque units (N·m on a dual scale wrench) for simple and error-free setting
- 'Push-through' ratchets allow torque control in both the clockwise and counter-clockwise directions
- Tough ratchets with narrow engagement angles allow for easy positioning of the tool in confined spaces (5° for models up to 200 N·m and 6° for models 300 N·m and above)
- Push/pull lock is fast and intuitive to use and prevents accidental adjustment of the set torque
- Convenient hanger feature for tool storage also aids wrench unlocking and adjustment
- Tethered versions are available for working at height (see page 16)



Left to Right: Torque Handle, Ratchet & Female Torque Handle



Primary Scale



Micrometer Scale

On dual scale wrenches, the micrometer scale refers to the N·m value only



NORTORQUE®



2 RATCHET ADJUSTABLE - DUAL SCALE

130101*	Model 60, $\frac{3}{8}$ ", 12 - 60 N·m, 10 - 45 lbf·ft
130103*	Model 100, $\frac{1}{2}$ ", 20 - 100 N·m, 20 - 80 lbf·ft
130104	Model 200, $\frac{1}{2}$ ", 40 - 200 N·m, 30 - 150 lbf·ft
130105	Model 300, $\frac{1}{2}$ ", 60 - 300 N·m, 45 - 220 lbf·ft
130106	Model 340, $\frac{1}{2}$ ", 60 - 340 N·m, 45 - 250 lbf·ft



* Supplied with $\frac{1}{2}$ " sq. dr. adaptor* Supplied with $\frac{3}{8}$ " sq. dr. adaptor

2 TORQUE HANDLE ADJUSTABLE 16 mm SPIGOT - DUAL SCALE

130141	Model 60, 16 mm spigot, 12 - 60 N·m, 10 - 45 lbf·ft
130142	Model 100, 16 mm spigot, 20 - 100 N·m, 20 - 80 lbf·ft
130143	Model 200, 16 mm spigot, 40 - 200 N·m, 30 - 150 lbf·ft
130144	Model 300, 16 mm spigot, 60 - 300 N·m, 45 - 220 lbf·ft





Ratchet Adjustable

Model	NorTorque 60	NorTorque 100	NorTorque 200	NorTorque 300	NorTorque 340
Part Number	130101 130111	130103 130113	130104 130114	130105 130115	130106 130116
Dimensions (mm)	A	328	375	459	587
	B	310	354	437	562
	C	209	252	335	460
	ØD	36	42	45	52
	E	34	38	45	45
	F	21	22	25	25
Weight (kg)	0.7	0.8	1.0	1.4	1.6



Female Torque Handle Adjustable

Model	NorTorque 60 9 x 12 mm	NorTorque 100 9 x 12 mm	NorTorque 200 9 x 12 mm	NorTorque 200 14 x 18 mm	NorTorque 300 14 x 18 mm	NorTorque 340 14 x 18 mm
Part Number	130121 130131	130123 130133	130125 130135	130126 130136	130127 130137	130128 130138
Dimensions (mm)	A	319	360	437	446	566
	B	308	348	426	430	550
	C	206	247	324	329	448
	D	22	22	24	33	36
	E	20	20	20	25	28
Weight (kg)	0.6	0.7	0.8	0.9	1.2	1.3

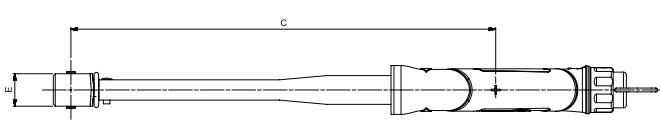

Torque Handle Adjustable 16 mm Spigot

Model	NorTorque 60	NorTorque 100	NorTorque 200	NorTorque 300
Part Number	130141 130161	130142 130162	130143 130163	130144 130164
Dimensions (mm)	A	317	357	439
	B	310	350	433
	C	208	248	331
	ØD	16	16	16
Weight (kg)	0.6	0.7	0.8	1.1



SCREWDRIVERS AND TORQUE WRENCHES

PROFESSIONAL 'P' TYPE TORQUE WRENCHES



For production line applications requiring a sealed torque setting, 'P' Type wrenches have no scale and must be set against a suitable torque measuring device (see pages 76 - 83).

- Accurate to $\pm 3\%$ of reading which meets the requirements of ISO 6789-1:2017
- Colour-coded adjustment seals and locking tool provided
- On request 'P' Type wrenches can be set, marked with the setting and certified for production line applications requiring a sealed torque setting. Only if a pre-set has been requested will the tool be supplied with a Declaration of Conformance



- Push-through ratchet allows clockwise and counter-clockwise torque control

2	PRODUCTION 'P' TYPE - INDUSTRIAL RATCHET (Push-through square)
13051	Pro 60, $\frac{3}{8}$ ", 12 - 60 N·m, 5 - 45 lbf·ft
13052	Pro 60, $\frac{1}{2}$ ", 12 - 60 N·m, 5 - 45 lbf·ft
13053	Pro 100, $\frac{3}{8}$ ", 20 - 100 N·m, 15 - 75 lbf·ft
13054	Pro 100, $\frac{1}{2}$ ", 20 - 100 N·m, 15 - 75 lbf·ft
13055	Pro 200, $\frac{1}{2}$ ", 40 - 200 N·m, 30 - 150 lbf·ft
13057	Pro 300, $\frac{1}{2}$ ", 60 - 300 N·m, 45 - 220 lbf·ft
13056	Pro 400, $\frac{3}{4}$ ", 80 - 400 N·m, 60 - 300 lbf·ft
11698	Calibration Kit Professional 'P' Type
SQ2222	Pre-set, etch and certify (Allow 3 days delivery for this service)



Colour-coded
adjustment seals

2	TORQUE HANDLE PRODUCTION 'P' TYPE 16 mm SPIGOT
11167	Pro 60, 16 mm spigot, 12 - 60 N·m, 5 - 45 lbf·ft
11143	Pro 100, 16 mm spigot, 20 - 100 N·m, 15 - 75 lbf·ft
11144	Pro 200, 16 mm spigot, 40 - 200 N·m, 30 - 150 lbf·ft
11117	Pro 300, 16 mm spigot, 60 - 300 N·m, 45 - 220 lbf·ft
SQ2222	Pre-set, etch and certify (Allow 3 days delivery for this service)



- Reversible, 72 tooth ratchet

2	PRODUCTION 'P' TYPE AUTOMOTIVE RATCHET (Reversible)
11164	Pro 60, $\frac{3}{8}$ ", 12 - 60 N·m, 5 - 45 lbf·ft
11171	Pro 60, $\frac{1}{2}$ ", 12 - 60 N·m, 5 - 45 lbf·ft
11138	Pro 100, $\frac{3}{8}$ ", 20 - 100 N·m, 15 - 75 lbf·ft
11139	Pro 100, $\frac{1}{2}$ ", 20 - 100 N·m, 15 - 75 lbf·ft
11140	Pro 200, $\frac{1}{2}$ ", 40 - 200 N·m, 30 - 150 lbf·ft
SQ2222	Pre-set, etch and certify (Allow 3 days delivery for this service)



2	FEMALE TORQUE HANDLE PRODUCTION 'P' TYPE
11170	Pro 60, 9 x 12 mm, 12 - 60 N·m, 5 - 45 lbf·ft
11150	Pro 100, 9 x 12 mm, 20 - 100 N·m, 15 - 75 lbf·ft
11151	Pro 200, 9 x 12 mm, 40 - 200 N·m, 30 - 150 lbf·ft
11152	Pro 200, 14 x 18 mm, 40 - 200 N·m, 30 - 150 lbf·ft
11153	Pro 300, 14 x 18 mm, 60 - 300 N·m, 45 - 220 lbf·ft
13068	Pro 400, 14 x 18 mm, 80 - 400 N·m, 60 - 300 lbf·ft
SQ2222	Pre-set, etch and certify (Allow 3 days delivery for this service)




PROFESSIONAL 'P' TYPE TORQUE WRENCHES




Industrial Ratchet

Model	Pro 60, 3/8"	Pro 60, 1/2"	Pro 100, 3/8"	Pro 100, 1/2"	Pro 200	Pro 300	Pro 400	
Part Number	13051	13052	13053	13054	13055	13057	13056	
Dimensions (mm)	A	295	301	335	342	425	668	675
B	277	281	317	321	403	641	649	
C	212	216	252	256	338	577	584	
ØD	36	42	36	42	45	54	52	
E	34	38	34	38	46	46	51	
F	21	23	21	22	29	29	28	
Weight (kg)	0.6	0.7	0.7	0.7	1.0	1.2	2.0	

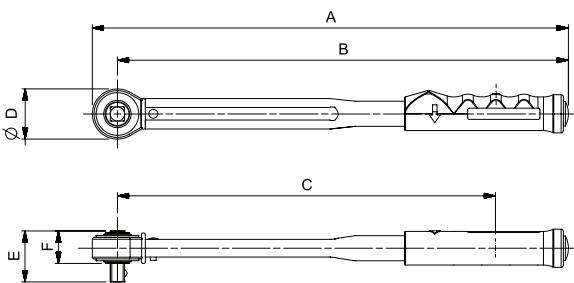


Automotive Ratchet

Model	Pro 60, 3/8"	Pro 60, 1/2"	Pro 100, 3/8"	Pro 100, 1/2"	Pro 200	
Part Number	11164	11171	11138	11139	11140	
Dimensions (mm)	A	289	289	351	351	447
B	274	274	314	314	404	
C	209	209	249	249	339	
ØD	30	30	30	30	42	
E	33	38	33	38	43	
F	22	22	22	22	27	
Weight (kg)	0.6	0.6	0.7	0.7	1	

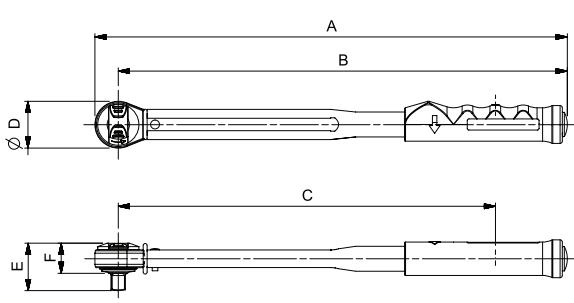


Spigot Torque Handle

Model	Pro 60	Pro 100	Pro 200	Pro 300	
Part Number	11167	11143	11144	11117	
Dimensions (mm)	A	283	324	405	665
B	277	317	399	637	
C	212	252	334	572	
ØD	16	16	16	16	
Weight (kg)	0.6	0.6	0.8	1.1	

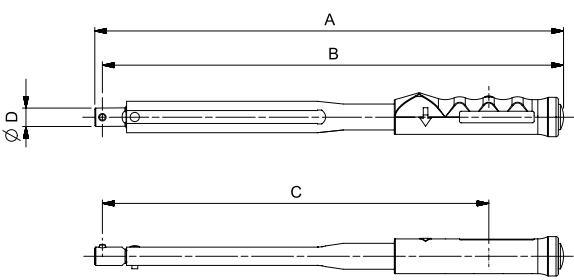

Female Torque Handle

Model	Pro 60 9 x 12 mm	Pro 100 9 x 12 mm	Pro 200, 9 x 12 mm	Pro 200, 14 x 18 mm	Pro 300 14 x 18 mm	Pro 400 14 x 18 mm	
Part Number	11170	11150	11151	11152	11153	13068	
Dimensions (mm)	A	286	326	403	414	534	652
B	274	314	392	400	518	637	
C	210	250	327	336	453	573	
D	22	22	25	34	36	32	
E	20	20	20	26	28	24	
Weight (kg)	0.6	0.6	0.8	0.8	1.1	1.8	

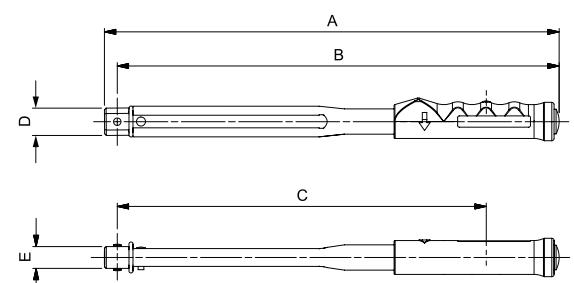



SCREWDRIVERS AND TORQUE WRENCHES

PROFESSIONAL TORQUE WRENCHES



Since its original, award winning launch in 1984, Norbar's Professional torque wrench range has become one of the most popular wrench ranges available worldwide. In this re-engineered version, the core principles of accuracy, durability and comfort are carried over but almost every component part is new and improved.



- Accurate to $\pm 3\%$ of reading which meets the requirements of ISO 6789-2:2017
- Supplied with a traceable 'Calibration Certificate' allowing end users to adhere to more stringent quality control processes

- Large scale for better visibility and more accurate setting
- Fast scale adjustment reducing the effort required to adjust. If you adjust your wrench regularly, you can do more work



Unlocked



Locked



Automotive Ratchet



Industrial Ratchet



Female Torque Handle



16 mm Spigot End

Compared with other torque wrenches:

Norbar's 'harmonic drive' scale provides a long scale length for good resolution and accurate setting in both scale units. By contrast, micrometer type scales allow accurate setting in the primary scale unit but relatively poor accuracy of setting in the secondary units because of limited resolution. The Professional wrench is amongst the easiest wrenches on the market to accurately set.



PROFESSIONAL TORQUE WRENCHES



2 INDUSTRIAL RATCHET ('Mushroom' Head) - DUAL SCALE

15002*	Pro 50, $\frac{3}{8}$ ", 10 - 50 N·m, 7.5 - 37.5 lbf·ft
15003*	Pro 100, $\frac{1}{2}$ ", 20 - 100 N·m, 15 - 75 lbf·ft
15004	Pro 200, $\frac{1}{2}$ ", 40 - 200 N·m, 30 - 150 lbf·ft
15005	Pro 300, $\frac{1}{2}$ ", 60 - 300 N·m, 44 - 222 lbf·ft
15006	Pro 340, $\frac{1}{2}$ ", 60 - 340 N·m, 44 - 250 lbf·ft
15007*	Pro 400, $\frac{3}{4}$ ", 80 - 400 N·m, 60 - 300 lbf·ft

2 INDUSTRIAL RATCHET ('Mushroom' Head) - N·m ONLY

15042*	Pro 50, $\frac{3}{8}$ ", 10 - 50 N·m
15043	Pro 100, $\frac{1}{2}$ ", 20 - 100 N·m
15044	Pro 200, $\frac{1}{2}$ ", 40 - 200 N·m
15045	Pro 300, $\frac{1}{2}$ ", 60 - 300 N·m
15046	Pro 340, $\frac{1}{2}$ ", 60 - 340 N·m
15047*	Pro 400, $\frac{3}{4}$ ", 80 - 400 N·m

2 INDUSTRIAL RATCHET ('Mushroom' Head) - lbf·ft ONLY

15172*	Pro 50, $\frac{3}{8}$ ", 7.5 - 37.5 lbf·ft
15173	Pro 100, $\frac{1}{2}$ ", 15 - 75 lbf·ft
15174	Pro 200, $\frac{1}{2}$ ", 30 - 150 lbf·ft
15175	Pro 300, $\frac{1}{2}$ ", 50 - 220 lbf·ft
15176	Pro 340, $\frac{1}{2}$ ", 45 - 250 lbf·ft
15177*	Pro 400, $\frac{3}{4}$ ", 60 - 300 lbf·ft

2 INDUSTRIAL RATCHET ('Mushroom' Head) - lbf·in ONLY

15052*	Pro 50, $\frac{3}{8}$ ", 90 - 440 lbf·in
15053	Pro 100, $\frac{1}{2}$ ", 200 - 900 lbf·in
15054	Pro 200, $\frac{1}{2}$ ", 400 - 1,800 lbf·in
15055	Pro 300, $\frac{1}{2}$ ", 500 - 2,500 lbf·in
15056	Pro 340, $\frac{1}{2}$ ", 500 - 3,000 lbf·in
15057*	Pro 400, $\frac{3}{4}$ ", 700 - 3,500 lbf·in

* Supplied with $\frac{1}{2}$ " sq. dr. adaptor

* Supplied with $\frac{3}{8}$ " sq. dr. adaptor

* Model 400 supplied with a Stepped Square

2 AUTOMOTIVE RATCHET (Reversible) - DUAL SCALE

15220	Pro 15, $\frac{1}{4}$ ", 3 - 15 N·m, 27 - 132 lbf·in
15221	Pro 15, $\frac{3}{8}$ ", 3 - 15 N·m, 27 - 132 lbf·in
15222	Pro 25, $\frac{1}{4}$ ", 5 - 25 N·m, 44 - 220 lbf·in
15223	Pro 25, $\frac{3}{8}$ ", 5 - 25 N·m, 44 - 220 lbf·in
15012	Pro 50, $\frac{3}{8}$ ", 10 - 50 N·m, 7.5 - 37.5 lbf·ft
15013	Pro 50, $\frac{1}{2}$ ", 10 - 50 N·m, 7.5 - 37.5 lbf·ft
15014	Pro 100, $\frac{3}{8}$ ", 20 - 100 N·m, 15 - 75 lbf·ft
15015	Pro 100, $\frac{1}{2}$ ", 20 - 100 N·m, 15 - 75 lbf·ft
15016	Pro 200, $\frac{1}{2}$ ", 40 - 200 N·m, 30 - 150 lbf·ft

2 AUTOMOTIVE RATCHET (Reversible) - N·m ONLY

15224	Pro 15, $\frac{1}{4}$ ", 3 - 15 N·m
15225	Pro 15, $\frac{3}{8}$ ", 3 - 15 N·m
15226	Pro 25, $\frac{1}{4}$ ", 5 - 25 N·m
15227	Pro 25, $\frac{3}{8}$ ", 5 - 25 N·m
15022	Pro 50, $\frac{3}{8}$ ", 10 - 50 N·m
15023	Pro 50, $\frac{1}{2}$ ", 10 - 50 N·m
15024	Pro 100, $\frac{3}{8}$ ", 20 - 100 N·m
15025	Pro 100, $\frac{1}{2}$ ", 20 - 100 N·m
15026	Pro 200, $\frac{1}{2}$ ", 40 - 200 N·m

2 AUTOMOTIVE RATCHET (Reversible) - lbf·ft ONLY

15142	Pro 50, $\frac{3}{8}$ ", 7.5 - 37.5 lbf·ft
15143	Pro 50, $\frac{1}{2}$ ", 7.5 - 37.5 lbf·ft
15144	Pro 100, $\frac{3}{8}$ ", 15 - 75 lbf·ft
15145	Pro 100, $\frac{1}{2}$ ", 15 - 75 lbf·ft
15146	Pro 200, $\frac{1}{2}$ ", 30 - 150 lbf·ft

2 AUTOMOTIVE RATCHET (Reversible) - lbf·in ONLY

15228	Pro 15, $\frac{1}{4}$ ", 27 - 132 lbf·in
15229	Pro 15, $\frac{3}{8}$ ", 27 - 132 lbf·in
15230	Pro 25, $\frac{1}{4}$ ", 44 - 220 lbf·in
15231	Pro 25, $\frac{3}{8}$ ", 44 - 220 lbf·in
15032	Pro 50, $\frac{3}{8}$ ", 90 - 440 lbf·in
15033	Pro 50, $\frac{1}{2}$ ", 90 - 440 lbf·in
15034	Pro 100, $\frac{3}{8}$ ", 200 - 900 lbf·in
15035	Pro 100, $\frac{1}{2}$ ", 200 - 900 lbf·in
15036	Pro 200, $\frac{1}{2}$ ", 400 - 1,800 lbf·in



SCREWDRIVERS AND TORQUE WRENCHES

PROFESSIONAL TORQUE WRENCHES



2	TORQUE HANDLE ADJUSTABLE 16 mm SPIGOT - DUAL SCALE
15060	Pro 15, 16 mm spigot, 3 - 15 N·m, 27 - 132 lbf-in
15061	Pro 25, 16 mm spigot, 5 - 25 N·m, 44 - 220 lbf-in
15062	Pro 50, 16 mm spigot, 10 - 50 N·m, 7.5 - 37.5 lbf-ft
15063	Pro 100, 16 mm spigot, 20 - 100 N·m, 15 - 75 lbf-ft
15064	Pro 200, 16 mm spigot, 40 - 200 N·m, 30 - 150 lbf-ft
15065	Pro 300, 16 mm spigot, 60 - 300 N·m, 44 - 222 lbf-ft

2	TORQUE HANDLE ADJUSTABLE 16 mm SPIGOT - N·m ONLY
15070	Pro 15, 16 mm spigot, 3 - 15 N·m
15071	Pro 25, 16 mm spigot, 5 - 25 N·m
15072	Pro 50, 16 mm spigot, 10 - 50 N·m
15073	Pro 100, 16 mm spigot, 20 - 100 N·m
15074	Pro 200, 16 mm spigot, 40 - 200 N·m
15075	Pro 300, 16 mm spigot, 60 - 300 N·m

2	TORQUE HANDLE ADJUSTABLE 16 mm SPIGOT - lbf-ft ONLY
15082	Pro 50, 16 mm spigot, 7.5 - 37.5 lbf-ft
15083	Pro 100, 16 mm spigot, 15 - 75 lbf-ft
15084	Pro 200, 16 mm spigot, 30 - 150 lbf-ft
15085	Pro 300, 16 mm spigot, 50 - 220 lbf-ft

2	TORQUE HANDLE ADJUSTABLE 16 mm SPIGOT - lbf-in ONLY
15090	Pro 15, 16 mm spigot, 27 - 132 lbf-in
15091	Pro 25, 16 mm spigot, 44 - 220 lbf-in
15092	Pro 50, 16 mm spigot, 90 - 440 lbf-in
15093	Pro 100, 16 mm spigot, 200 - 900 lbf-in
15094	Pro 200, 16 mm spigot, 400 - 1,800 lbf-in
15095	Pro 300, 16 mm spigot, 500 - 2,500 lbf-in



2	FEMALE TORQUE HANDLE ADJUSTABLE - DUAL SCALE
15100	Pro 15, 9 x 12 mm, 3 - 15 N·m, 27 - 132 lbf-in
15101	Pro 25, 9 x 12 mm, 5 - 25 N·m, 44 - 220 lbf-in
15102	Pro 50, 9 x 12 mm, 10 - 50 N·m, 7.5 - 37.5 lbf-ft
15103	Pro 100, 9 x 12 mm, 20 - 100 N·m, 15 - 75 lbf-ft
15104	Pro 200, 9 x 12 mm, 40 - 200 N·m, 30 - 150 lbf-ft
15105	Pro 200, 14 x 18 mm, 40 - 200 N·m, 30 - 150 lbf-ft
15106	Pro 300, 14 x 18 mm, 60 - 300 N·m, 44 - 222 lbf-ft
15107	Pro 340, 14 x 18 mm, 60 - 340 N·m, 44 - 250 lbf-ft
15108	Pro 400, 14 x 18 mm, 80 - 400 N·m, 60 - 300 lbf-ft

2	FEMALE TORQUE HANDLE ADJUSTABLE - N·m ONLY
15110	Pro 15, 9 x 12 mm, 3 - 15 N·m
15111	Pro 25, 9 x 12 mm, 5 - 25 N·m
15112	Pro 50, 9 x 12 mm, 10 - 50 N·m
15113	Pro 100, 9 x 12 mm, 20 - 100 N·m
15114	Pro 200, 9 x 12 mm, 40 - 200 N·m
15115	Pro 200, 14 x 18 mm, 40 - 200 N·m
15116	Pro 300, 14 x 18 mm, 60 - 300 N·m
15117	Pro 340, 14 x 18 mm, 60 - 340 N·m
15118	Pro 400, 14 x 18 mm, 80 - 400 N·m

2	FEMALE TORQUE HANDLE ADJUSTABLE - lbf-ft ONLY
15122	Pro 50, 9 x 12 mm, 7.5 - 37.5 lbf-ft
15123	Pro 100, 9 x 12 mm, 15 - 75 lbf-ft
15124	Pro 200, 9 x 12 mm, 30 - 150 lbf-ft
15125	Pro 200, 14 x 18 mm, 30 - 150 lbf-ft
15126	Pro 300, 14 x 18 mm, 50 - 220 lbf-ft
15127	Pro 340, 14 x 18 mm, 45 - 250 lbf-ft
15128	Pro 400, 14 x 18 mm, 60 - 300 lbf-ft

2	FEMALE TORQUE HANDLE ADJUSTABLE - lbf-in ONLY
15130	Pro 15, 9 x 12 mm, 27 - 132 lbf-in
15131	Pro 25, 9 x 12 mm, 44 - 220 lbf-in
15132	Pro 50, 9 x 12 mm, 90 - 440 lbf-in
15133	Pro 100, 9 x 12 mm, 200 - 900 lbf-in
15134	Pro 200, 9 x 12 mm, 400 - 1,800 lbf-in
15135	Pro 200, 14 x 18 mm, 400 - 1,800 lbf-in
15136	Pro 300, 14 x 18 mm, 500 - 2,500 lbf-in
15137	Pro 340, 14 x 18 mm, 500 - 3,000 lbf-in
15138	Pro 400, 14 x 18 mm, 700 - 3,500 lbf-in




PROFESSIONAL TORQUE WRENCHES




Industrial Ratchet

Model	Pro 50	Pro 100	Pro 200	Pro 300	Pro 340	Pro 400
Part Number	15002	15003	15004	15005	15006	15007
	15042	15043	15044	15045	15046	15047
	15172	15173	15174	15175	15176	15177
	15052	15053	15054	15055	15056	15057
Dimensions (mm)	A	335	387	470	593	685
	B	317	364	447	567	659
	C	231	278	361	480	572
	ØD	35	45	45	52	51
	E	37	48	48	48	47
	F	26	32	32	33	24
Weight (kg)	0.7	0.9	1.1	1.4	1.5	1.9

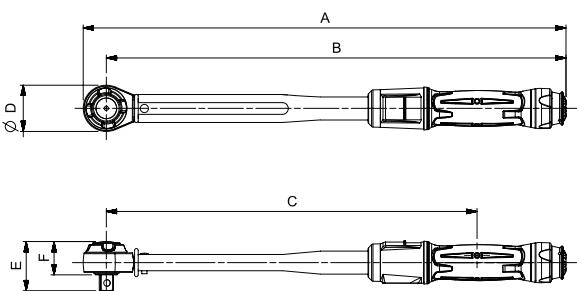


Automotive Ratchet

Model	Pro 15 Pro 25	Pro 50 $\frac{3}{8}''$	Pro 50 $\frac{1}{2}''$	Pro 100 $\frac{3}{8}''$	Pro 100 $\frac{1}{2}''$	Pro 200
Part Number	15008, 15009, 15010, 15011, 15018, 15019, 15020, 15021, 15028, 15029, 15030, 15031	15012	15013	15014	15015	15016
		15022	15023	15024	15025	15026
		15142	15143	15144	15145	15146
		15032	15033	15034	15035	15036
Dimensions (mm)	A	221	327	367	367	465
	B	209	312	312	352	444
	C	140	226	226	266	358
	ØD	25	30	30	30	43
	E	25	33	38	33	46
	F	18	22	22	22	30
Weight (kg)	0.3	0.7	0.7	0.8	0.8	1.0

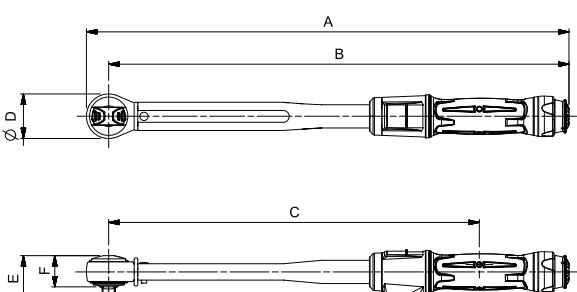


Spigot Torque Handle

Model	Pro 15 Pro 25	Pro 50	Pro 100	Pro 200	Pro 300
Part Number	15060	15062	15063	15064	15065
	15061	15072	15073	15074	15075
	15070	15082	15083	15084	15085
	15071	15092	15093	15094	15095
Dimensions (mm)	A	223	322	363	445
	B	216	316	356	438
	C	148	229	269	351
	ØD	16	16	16	16
Weight (kg)	0.3	0.6	0.7	0.9	1.2

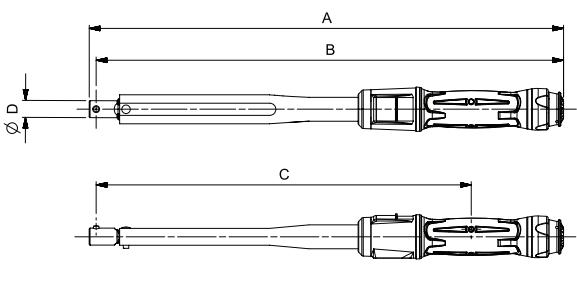

Female Torque Handle

Model	Pro 15 Pro 25	Pro 50	Pro 100	Pro 200 9 x 12 mm	Pro 200 14 x 18 mm	Pro 300	Pro 340	Pro 400
Part Number	15100	15102	15103	15104	15105	15106	15107	15108
	15101	15112	15113	15114	15115	15116	15117	15118
	15110	15122	15123	15124	15125	15126	15127	15128
	15111	15132	15133	15134	15135	15136	15137	15138
Dimensions (mm)	A	218	325	365	442	453	570	662
	B	204	314	354	431	440	557	649
	C	139	227	267	345	353	440	562
	D	22	22	22	25	34	34	32
	E	20	20	20	20	26	28	24
Weight (kg)	0.3	0.6	0.7	0.9	1.0	1.2	1.3	1.7

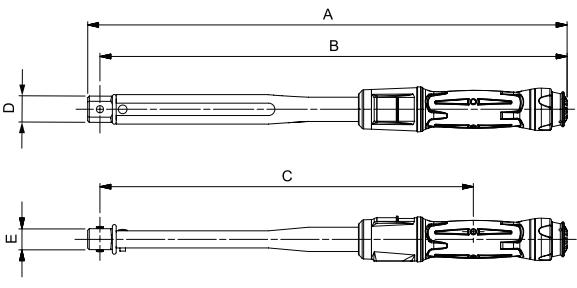



SCREWDRIVERS AND TORQUE WRENCHES

PROFESSIONAL TORQUE WRENCHES NLD SERIES



For precision applications up to 1,500 N·m

- Exceptionally clear torque signal from unique mechanism
- Non-length dependent (NLD) so can be used with or without the supplied extension handle (optional on Pro 650)
- Extension handle significantly reduces operator effort to achieve high torque values
- Accurate to $\pm 3\%$ of reading which meets the requirements of ISO 6789-2:2017
- On request 'P' Type wrenches can be set, marked with the setting and certified for production line applications requiring a sealed torque setting. Only if a pre-set has been requested will the tool be supplied with a Declaration of Conformance



2	RATCHET PRODUCTION 'P' TYPE (Must be set using a Torque Tester, see pages 7676 - 83)
14039	Pro 650, $\frac{3}{4}$ ", 130 - 650 N·m, 100 - 480 lbf·ft
14017	Pro 800, $\frac{3}{4}$ ", 200 - 800 N·m, 150 - 600 lbf·ft
14018	Pro 800, 1", 200 - 800 N·m, 150 - 600 lbf·ft
14007	Pro 1000, $\frac{3}{4}$ ", 300 - 1,000 N·m, 220 - 750 lbf·ft
14008	Pro 1000, 1", 300 - 1,000 N·m, 220 - 750 lbf·ft
14009	Pro 1500, $\frac{3}{4}$ ", 500 - 1,500 N·m, 370 - 1,100 lbf·ft
14010	Pro 1500, 1", 500 - 1,500 N·m, 370 - 1,100 lbf·ft
SQ2222	Pre-set, etch and certify (Allow 3 days delivery for this service)

2	TORQUE HANDLE PRODUCTION 'P' TYPE (Must be set using a Torque Tester, see pages 7676 - 83)
14042	Pro 650, 22 mm spigot, 130 - 650 N·m, 100 - 480 lbf·ft
SQ2222	Pre-set, etch and certify (Allow 3 days delivery for this service)

2	FEMALE TORQUE HANDLE PRODUCTION 'P' TYPE (Must be set using a Torque Tester, see pages 7676 - 83)
14043	Pro 650, 14 x 18 mm, 130 - 650 N·m, 100 - 480 lbf·ft
SQ2222	Pre-set, etch and certify (Allow 3 days delivery for this service)



8	PRO 650 - 1500 ACCESSORY
14142	Extension Handle (included with Pro 800 - 1500 as standard)



All models supplied in carry case






PROFESSIONAL TORQUE WRENCHES NLD SERIES



Push-Through Ratchet

Model	Pro 650	Pro 800 ¼"	Pro 800 1"	Pro 1000 ¼"	Pro 1000 1"	Pro 1500 ¼"	Pro 1500 1"	Pro 650 'P' Type	Pro 800 ¼" 'P' Type	Pro 800 1" 'P' Type	Pro 1000 ¼" 'P' Type	Pro 1000 1" 'P' Type	Pro 1500 ¼" 'P' Type	Pro 1500 1" 'P' Type
Part Number	14037	14015	14016	14002	14003	14004	14005	14039	14017	14018	14007	14008	14009	14010
A	856	1,037	1,037	1,245	1,245	1,571	1,571	848	1,030	1,030	1,238	1,238	1,563	1,563
B	823	999	999	1,208	1,208	1,533	1,533	816	992	992	1,201	1,201	1,526	1,526
C	713	889	889	1,097	1,097	1,423	1,422	713	889	889	1,097	1,097	1,424	1,423
ØD	66	75	75	75	75	75	75	66	75	75	75	75	75	75
E	56	58	66	58	66	58	66	55	58	66	58	58	58	66
F	30	33	33	38	38	38	38	35	38	38	38	38	38	38
Weight (kg)	4.0	5.2	5.2	5.8	5.8	6.7	6.7	4.0	5.2	5.2	5.7	5.7	6.7	6.7

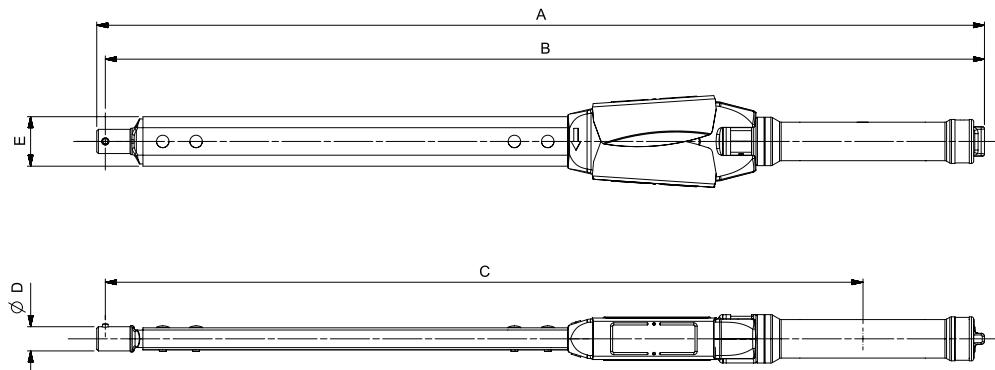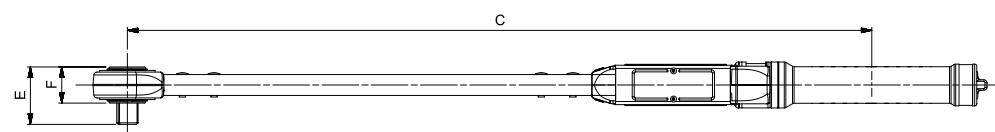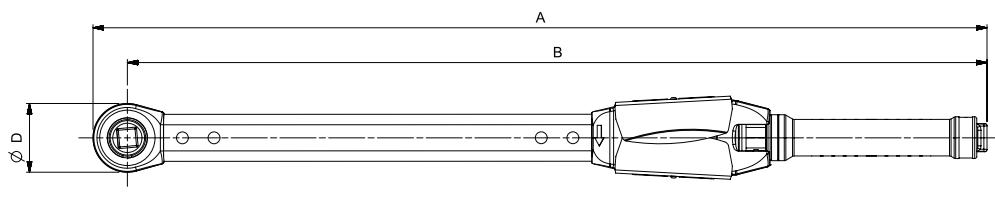


Spigot Torque Handle

Model	Pro 650	Pro 650 'P' Type
Part Number	14040	14042
A	807	800
B	799	792
C	688	689
ØD	22	22
E	45	45
Weight (kg)	3.6	3.6

Female Torque Handle

Model	Pro 650	Pro 650 'P' Type
Part Number	14041	14043
A	830	823
B	815	808
C	704	705
D	30	30
E	45	45
F	23	23
Weight (kg)	3.6	3.6

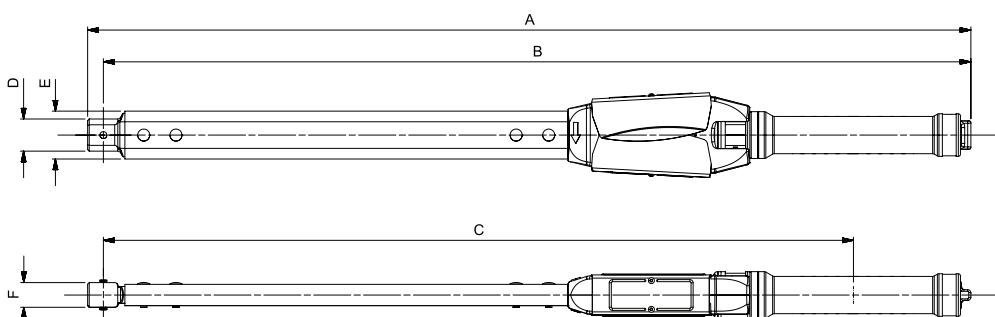

NOTE: When using the Extension Handle (14142) add 495 mm to dimensions 'A' and 'B', add 515 mm to dimension C and add 1.6 kg to the weight.



SCREWDRIVERS AND TORQUE WRENCHES

INDUSTRIAL TORQUE WRENCHES ADJUSTABLE & 'P' TYPE - NEW GENERATION



A long-time customer favourite for their unmistakable signal and robustness but now simple to accurately set and split for ease of storage and transportation.

- Unique profiled cam and reaction plate - gives clear torque break point reducing the possibility of over-torqueing
- Robust construction gives accurate results to $\pm 4\%$ even in arduous working conditions, meeting the requirements of ISO 6789-1:2017
- Easy to read scale is shielded from dust, dirt and spray
- Easy to set accurately
- Can be split and packed in two parts for a smaller, easier to transport package
- Push-through ratchet allows two direction torqueing (Not available for 6R-N models).
- Designed to be cost effectively serviced
- New handle - more comfortable and guides operator's hand to correct position



2 RATCHET ADJUSTABLE - DUAL SCALE

120101 3AR-N, $\frac{3}{4}$ ", 120 - 600 N·m, 100 - 450 lbf·ft

120101.01 3AR-N, 1", 120 - 600 N·m, 100 - 450 lbf·ft

120110 4AR-N, $\frac{3}{4}$ ", 200 - 800 N·m, 150 - 600 lbf·ft

120110.01 4AR-N, 1", 200 - 800 N·m, 150 - 600 lbf·ft

120115 5R-N, $\frac{3}{4}$ ", 300 - 1,000 N·m, 200 - 750 lbf·ft

120115.01 5R-N, 1", 300 - 1,000 N·m, 200 - 750 lbf·ft

120118 5AR-N, $\frac{3}{4}$ ", 700 - 1,500 N·m, 500 - 1,000 lbf·ft

120118.01 5AR-N, 1", 700 - 1,500 N·m, 500 - 1,000 lbf·ft

120120 6R-N, 1", 900 - 2,000 N·m, 700 - 1,500 lbf·ft

2 RATCHET ADJUSTABLE - N·m ONLY

120107 3AR-N, $\frac{3}{4}$ ", 120 - 600 N·m

120107.01 3AR-N, 1", 120 - 600 N·m

120114 4AR-N, $\frac{3}{4}$ ", 200 - 800 N·m

120114.01 4AR-N, 1", 200 - 800 N·m

120117 5R-N, $\frac{3}{4}$ ", 300 - 1,000 N·m

120117.01 5R-N, 1", 300 - 1,000 N·m

120119 5AR-N, $\frac{3}{4}$ ", 700 - 1,500 N·m

120119.01 5AR-N, 1", 700 - 1,500 N·m

120121 6R-N, 1", 900 - 2,000 N·m

2 TORQUE HANDLE ADJUSTABLE - DUAL SCALE

120102 3AR-N, 22 mm Spigot, 120 - 600 N·m, 100 - 450 lbf·ft

2 TORQUE HANDLE ADJUSTABLE - N·m ONLY

120108 3AR-N, 22 mm Spigot, 120 - 600 N·m



2 RATCHET PRODUCTION 'P' TYPE (Must be set using a Torque Tester, see pages 76 - 83)

120104 3AR-N, $\frac{3}{4}$ ", 120 - 600 N·m, 100 - 450 lbf·ft

120104.01 3AR-N, 1", 120 - 600 N·m, 100 - 450 lbf·ft

120111 4AR-N, $\frac{3}{4}$ ", 200 - 800 N·m, 150 - 600 lbf·ft

120111.01 4AR-N, 1", 200 - 800 N·m, 150 - 600 lbf·ft

120116 5R-N, $\frac{3}{4}$ ", 300 - 1,000 N·m, 200 - 750 lbf·ft

120116.01 5R-N, 1", 300 - 1,000 N·m, 200 - 750 lbf·ft

120130 5AR-N, $\frac{3}{4}$ ", 700 - 1,500 N·m, 500 - 1,000 lbf·ft

120130.01 5AR-N, 1", 700 - 1,500 N·m, 500 - 1,000 lbf·ft

SQ2222 Pre-set, etch and certify
(Allow 3 days delivery for this service)

2 TORQUE HANDLE PRODUCTION 'P' TYPE (Must be set using a Torque Tester, see pages 76 - 83)

120105 3AR-N, 22 mm Spigot, 120 - 600 N·m, 100 - 450 lbf·ft

SQ2222 Pre-set, etch and certify
(Allow 3 days delivery for this service)



INDUSTRIAL TORQUE WRENCHES ADJUSTABLE AND 'P' TYPE - NEW GENERATION



Industrial Push-Through Ratchets

Model	3AR-N	3AR-N 'P' Type	4AR-N	4AR-N 'P' Type	5R-N	5R-N 'P' Type	5AR-N	5AR-N 'P' Type	6R-N
Part Number	120101		120110		120115		120118		
	120101.01	120104	120110.01	120111	120115.01	120116	120118.01	120130	120120
	120107	120104.01	120114	120111.01	120117	120116.01	120119	120130.01	120121
	120107.01		120114.01		120117.01		120119.01		
Dimensions (mm)	A	954	954	1,214	1,214	1,449	1,449	1,764	1,764
	B	920	920	1,180	1,180	1,415	1,224	1,730	1,730
	C	829	829	1,089	1,089	1,324	1,324	1,608	1,608
	ØD	69	69	69	69	69	69	69	69
	E	75	75	75	75	75	75	75	75
	F	479	479	738	738	974	974	1,379	1,379
	G	$\frac{3}{4}'' = 55$ $1'' = 63$	63						
	H	35	35	35	35	35	35	35	35
	J max.	105	18	105	18	105	18	105	18
	ØK	38	38	38	38	38	38	38	38
Weight (kg)	6.0	6.0	6.7	6.7	7.4	7.4	9.6	9.6	12.75





Packed dimensions: (L x W x H)

3AR-N to 5R-N: 970 x 260 x 95 mm


5AR-N & 6R-N: 1,172 x 243 x 91 mm

4AR-N shown split in case

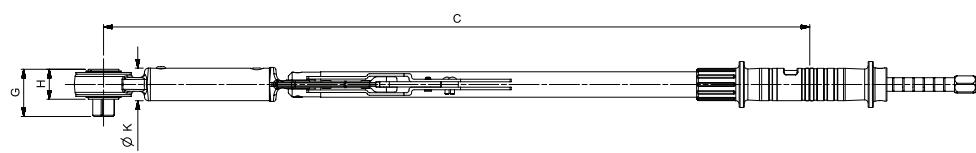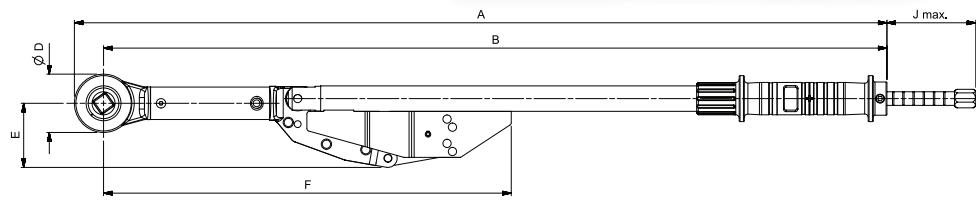

Spigot Torque Handle

Model	3AR-N	3AR-N 'P' Type
Part Number	120102	120105
Dimensions (mm)	A	927
	B	920
	C	829
	ØD	22
	E	75
	F	479
	J max.	105
	ØK	38
	Weight (kg)	6.0
		5.3

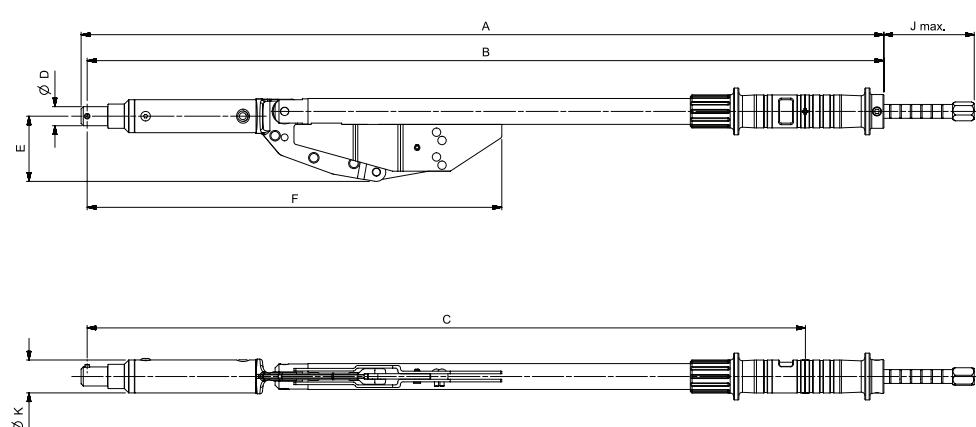

Design Nos. 182086 and 182087 (Canada); Design Nos. 004671063-0001 and 004671063-0002 (EU); Design Nos. D863904 and D871870 (USA)



SCREWDRIVERS AND TORQUE WRENCHES

INDUSTRIAL TORQUE WRENCH - BI-SQUARE



The $1\frac{1}{16}$ " Bi-square version of the Industrial Torque Wrench was developed specifically with rail track maintenance in mind. The critical need of the rail industry is to reduce the chance of any object being left on the track. Fitting directly onto rail fishplate bolts means that no socket or square drive is required, two components that could potentially be separated from the regular version of the Industrial Torque Wrench.

Other versions of this tool are available on request.

2 BI-SQUARE - DUAL SCALE

12026 $1\frac{1}{16}$ " Bi-Square, 300 - 1,000 N·m, 200 - 750 lbf·ft

ELECTRODE WRENCHES



For torque tightening of Electrode Wrenches

The correct torque tightening of electrodes is known to increase the energy efficiency of electric arc furnaces and helps prevent electrode sections being lost in the furnace.

Standard torque settings are shown. These are pre-set wrenches and the torque setting is not adjustable by the customer. The torque setting will be supplied at the value shown on this page unless a different torque setting is advised at the time of ordering by the customer (in which case add part number SQ2222 and the required torque value).


The 8" diameter electrode wrench uses the Professional torque handle as the control mechanism. Above 8" the Industrial wrench is used as the control mechanism.

9	LOW RANGE
12506	8" (200 mm) 312 N·m
12530	10" (250 mm) 542 N·m
12531	12" (300 mm) 780 N·m
SQ2222	Pre-set, etch and certify (Allow 3 days delivery for this service)

Other models available on request.

9	HIGH RANGE
12532	14" (350 mm) 1,140 N·m
12533	16" (400 mm) 1,300 N·m
12535	18" (450 mm) 1,500 N·m
12536	20" (500 mm) 2,000 N·m
12537	22" (550 mm) 2,370 N·m
12538	24" (600 mm) 2,370 N·m
12538.HD	24" (600 mm) 3,200 N·m
SQ2222	Pre-set, etch and certify (Allow 3 days delivery for this service)

Model	8" (200 mm)	10" (250 mm)	12" (300 mm)	14" (350 mm)	16" (400 mm)	18" (450 mm)	20" (500 mm)	22" (550 mm)	24" (600 mm)	24" (600 mm)	
Part Number	12506	12530	12531	12532	12533	12535	12536	12537	12538	12538.HD	
Dimensions (mm)	A	897	1,150	1,286	1,764	1,825	1,727	2,211	2,571	2,069	3,350
	B	159	194	239	288	299	336	386	398	424	446
	C	658	883	994	1,443	1,472	1,643	1,811	2,141	2,140	2,885
Weight (kg)	3.2	6.8	8.4	13.8	14.3	16.5	20.0	25.4	26.1	31.7	

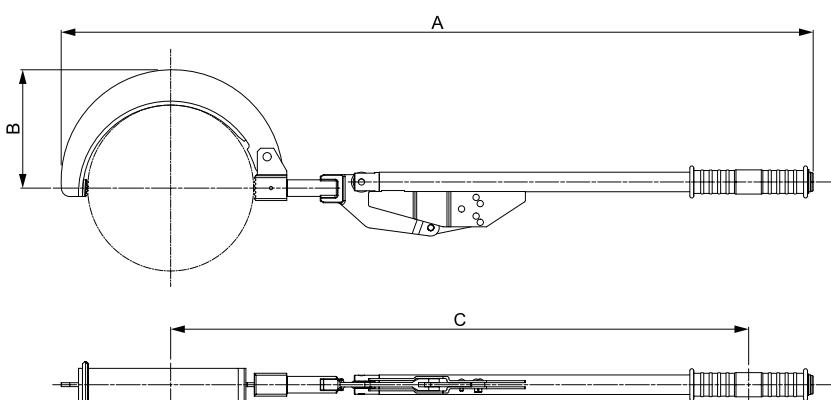



ELECTRONIC SCREWDRIVER AND TORQUE WRENCHES

ProTronic® Electronic Torque Wrenches	31
ProTronic® Plus Electronic Torque Wrenches	32
ProTronic® Plus Electronic Torque Screwdriver	33
ProTronic® Plus Model 10 and Model 30	33
ProTronic® Plus TorqApp™	34
Spanner End Fittings for 16 mm Torque Handles	35
Spanner End Fittings for 22 mm Torque Handles	36
Spigot Accessories	36
Large Spanner End Fittings for 16 mm Spigot Torque Handles up to 300 N·m	37
Large Spanner End Fittings for 22 mm Spigot Torque Handles up to 650 N·m	38

Norbar Torque Tools offers a range of high-precision electronic torque tools including a screwdriver and an extensive selection of torque wrenches to cover torque values from 0.45 to 800 N·m.

Many of the options in this section have the capability to connect to software that more easily manages data and configures settings. These highly accurate electronic torque and angle tools are the perfect solution for applications that require precision and control.





ELECTRONIC SCREWDRIVER AND TORQUE WRENCHES

PROTRONIC® ELECTRONIC TORQUE WRENCHES



The ProTronic® is a high precision electronic torque wrench with a large backlit LCD display, that measures accurate and consistent torque readings. It also features an audible buzzer when pre-set torque/angle value is reached.

- Dual progressive LEDs positioned both sides of the wrench provide an easy visual representation of torque progress allowing the user to more easily anticipate torque target
- Large LCD screen with bright backlight; numbers become larger and bolder during active torque for optimal viewing
- Four alert modes (LCD, progressive LED, audible, vibration) provide excellent feedback in all working conditions
- 5 easily selectable torque units: N·m, lbf·ft, lbf·in, dN·m, kg·cm and kg·m (200 N·m and above)
- The ability to programme up to 10 pre-sets in the tool saves time in setting up frequently occurring applications
- A wide range of advanced features (cycle counter, customisable sleep timer, language selection, auto torque calculation for torque adaptors, calibration alerts, battery level indication, and numerous alert mode customisations) allow the user to tailor the tool to their work preferences
- Torque THEN Angle mode gives the user the ability to conveniently apply an angle to a fastener directly after achieving a torque target without the need to remove the torque wrench from the application
- Settings allow for operation in either English, Spanish, French, German, Italian, Dutch or Portuguese
- Power interruption technology helps to prevent loss of work and continuity if the wrench is impacted
- Patent pending built-in calibration factor feature allows different head lengths to be easily accommodated
- Supplied with a traceable 'Calibration Certificate' conforming with ISO 6789-2:2017, allowing end users to adhere to more stringent quality control processes



4	PROTRONIC
130517	ProTronic 100, $\frac{3}{8}$ ", 5 - 100 N·m
130518	ProTronic 100, $\frac{1}{2}$ ", 5 - 100 N·m
130519	ProTronic 200, $\frac{1}{2}$ ", 10 - 200 N·m
130520	ProTronic 340, $\frac{1}{2}$ ", 17 - 340 N·m



ProTronic Standard Range

Model	ProTronic 100 $\frac{3}{8}$ "	ProTronic 100 $\frac{1}{2}$ "	ProTronic 200 $\frac{1}{2}$ "	ProTronic 340 $\frac{1}{2}$ "
Part Number	130517	130518	130519	130520
Dimensions (mm)	A	458	462	650
	B	439	439	627
	C	344	344	533
	ØD	38	46	52
	E	34	45	45
	F	21	29	29
Weight (kg)	1.15	1.30	1.65	1.85

- Accuracy of $\pm 2\%$ when operating between 20% to 100% of tool capacity
- Angle accuracy of $\pm 1\%$ of reading, $\pm 1^\circ$ @ Angular Velocity $> 10^\circ/\text{Sec}$ $< 180^\circ/\text{Sec}$, $\pm 1^\circ$ for test fixture

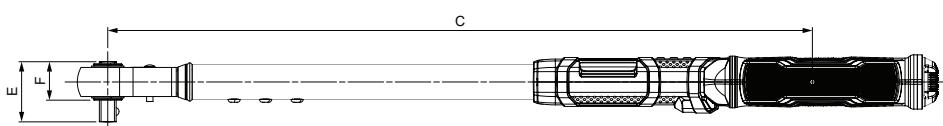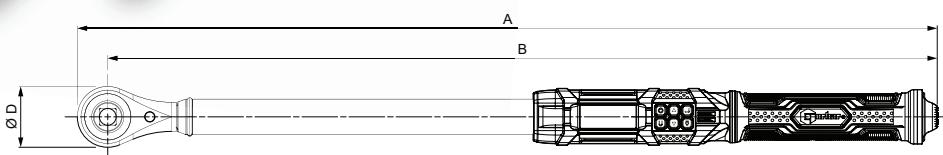

ELECTRONIC SCREWDRIVER AND TORQUE WRENCHES



PROTRONIC® PLUS ELECTRONIC TORQUE WRENCHES



The ProTronic® Plus retains all the features available in the ProTronic® standard versions and then adds more. Equipped with Bluetooth®, the ProTronic® Plus works alongside a specially created app that allows uploading of wrench configurations and logging of streamed torque and angle readings.


- Patent pending Torque AND Angle combo modes allow the user to monitor torque and angle simultaneously
- Works alongside newly developed TorqApp™ designed for live streaming of readings as they are taken
- Dual progressive LEDs have additional settings allowing customisation to user preference
- Up to 50 pre-sets can be programmed into the tool. Preset lock feature allows the tool to be set-up with only these pre-sets available to the operator
- Sequence programming and job modes allows the user to chain together pre-sets in a particular sequence
- UKAS accredited torque calibration in both clockwise and counter-clockwise direction

4	PROTRONIC PLUS
130512	ProTronic Plus 100, $\frac{3}{8}$ ", 5 - 100 N·m
130513	ProTronic Plus 100, $\frac{1}{2}$ ", 5 - 100 N·m
130514	ProTronic Plus 200, $\frac{1}{2}$ ", 10 - 200 N·m
130515	ProTronic Plus 340, $\frac{1}{2}$ ", 17 - 340 N·m
130516	ProTronic Plus 800, $\frac{3}{4}$ ", 40 - 800 N·m

- Accuracy of $\pm 2\%$ when operating between 20% to 100% of tool capacity.
- Accuracy of $\pm 4\%$ when operating between 5% to 19% of tool capacity, except for ProTronic® Plus 9, 10 and 30 where the counter clockwise accuracy between 5% to 19% will be 6%.
- Angle accuracy of $\pm 1\%$ of reading,
 $\pm 1^\circ$ @ Angular Velocity $> 10^\circ/\text{Sec} < 180^\circ/\text{Sec}$, $\pm 1^\circ$ for test fixture

Model	ProTronic Plus 100 $\frac{3}{8}$ "	ProTronic Plus 100 $\frac{1}{2}$ "	ProTronic Plus 200 $\frac{1}{2}$ "	ProTronic Plus 340 $\frac{1}{2}$ "	ProTronic Plus 800 $\frac{3}{4}$ "
Part Number	130512	130513	130514	130515	130516
Dimensions (mm)	A	458	462	650	749
	B	439	439	627	723
	C	344	344	533	629
	$\varnothing D$	38	46	46	52
	E	34	45	45	55
	F	21	29	29	32
Weight (kg)	1.15	1.30	1.65	1.85	4.95

ProTronic Plus
Torque Wrench
Range

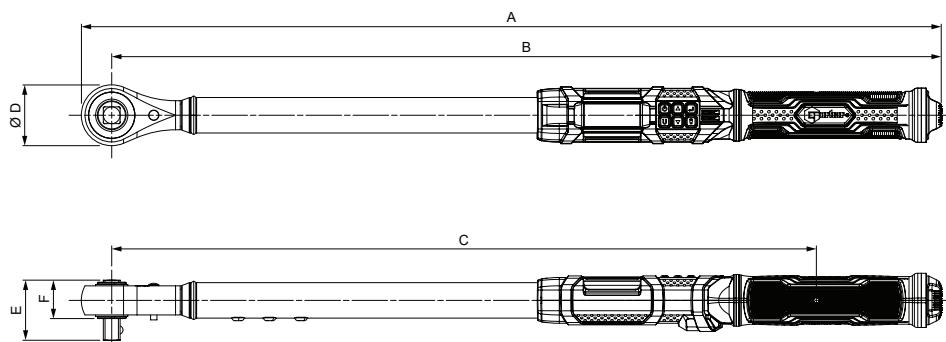



ELECTRONIC SCREWDRIVER AND TORQUE WRENCHES

PROTRONIC® PLUS ELECTRONIC TORQUE SCREWDRIVER




Calibration details



4

PROTRONIC PLUS

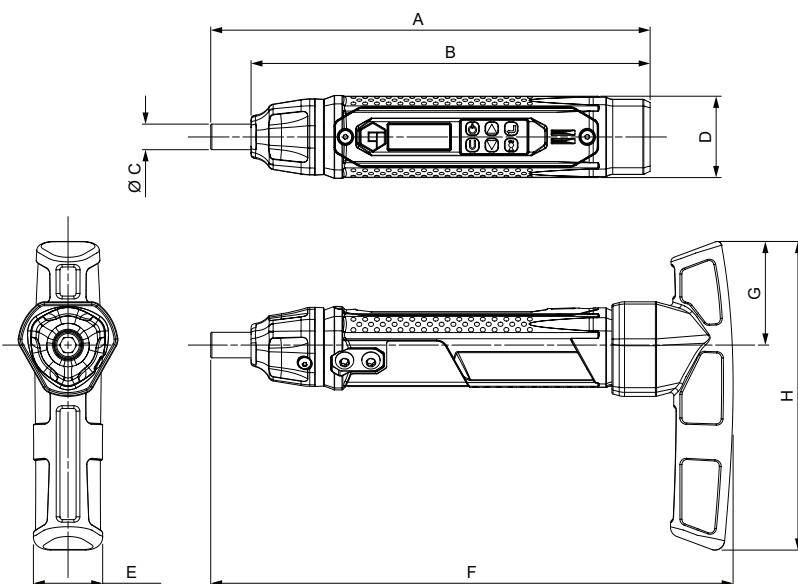130524 ProTronic Plus 9, $\frac{1}{4}$ " Female Hex, 0.45 - 9 N·m

Model	ProTronic Plus 9 $\frac{1}{4}$ "
Part Number	130524
Dimensions (mm)	
A	190
B	173
C	11
D	35
E	30
F	226
G	44
H	131
Weight (kg) without Handle	0.21
Weight (kg) with handle	0.33



PROTRONIC® PLUS MODEL 10 AND MODEL 30




Calibration details



The ProTronic® Plus Model 10 and Model 30 retain all the features of the ProTronic® standard and Plus Wrench in a more compact design allowing for lower torque and access to more space limited applications.

4 PROTRONIC PLUS

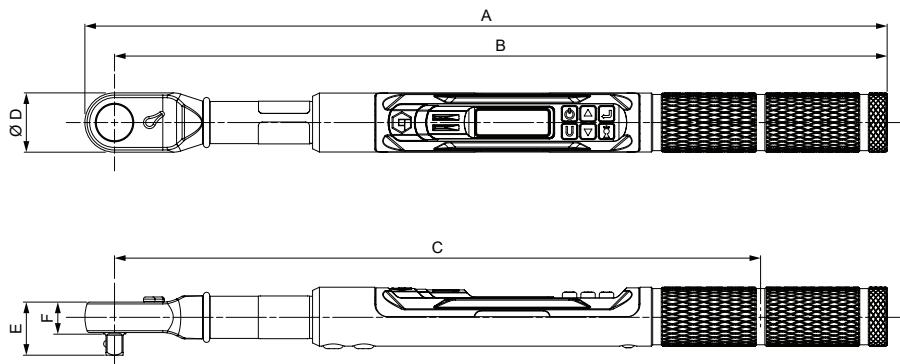130522 ProTronic Plus 10, $\frac{1}{4}$ ", 0.5 - 10 N·m130523 ProTronic Plus 30, $\frac{1}{4}$ ", 1.5 - 30 N·m

Model	ProTronic Plus 10 $\frac{1}{4}$ "	ProTronic Plus 30 $\frac{1}{4}$ "
Part Number	130522	130523
Dimensions (mm)		
A	282	298
B	271	287
C	234	240
D	22	22
E	20	20
F	12	12
Weight (kg)	0.39	0.42




PROTRONIC® PLUS TORQAPP™




TorqApp™ is a free, mobile application that connects to ProTronic® Plus, allowing the user to intuitively change tool settings and download results. Currently available on Android and iOS coming soon.

- Intuitively change tool settings with ease directly from your device
- Instantly receive individually-completed results, with the ability to email these in .csv format quickly
- Monitor application data and progress in real time aiding the operator in keeping a track of bolting progress, particularly useful for sequenced/linked jobs
- Revisiting failed results when in sequence is easy
- Easily view, download or upload application and tool information for past results helping to keep a comprehensive record for traceability purposes



TorqApp™ can connect
to any of these products
1 at a time

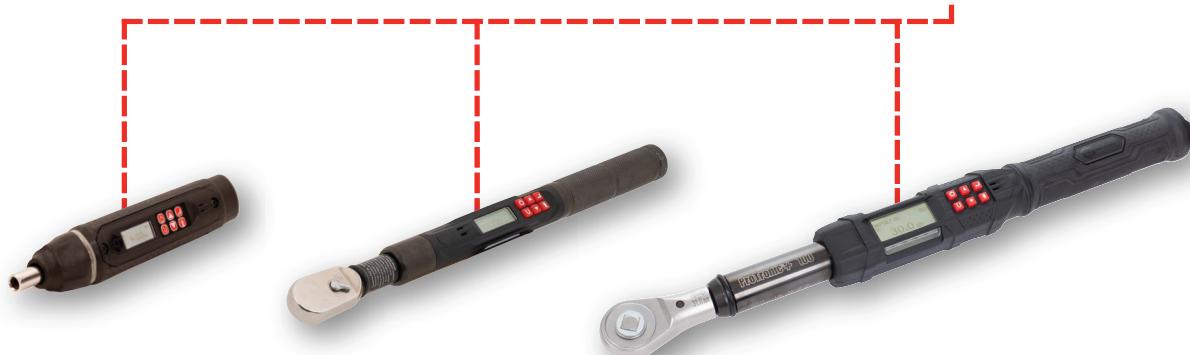



TORQUE WRENCH END FITTINGS

SPANNER END FITTINGS FOR 16 mm TORQUE HANDLES

See below for explanation of part numbers. Other sizes available on request – including bespoke ETO solutions.



2	OPEN ENDS METRIC
29841	7 mm, 9 N·m*
29842	8 mm, 13 N·m*
29843	9 mm, 19 N·m*
29844	10 mm, 25 N·m*
29845	11 mm, 32 N·m*
29846	12 mm, 41 N·m*
29847	13 mm, 51 N·m*
29848	14 mm, 63 N·m*
29849	15 mm, 77 N·m*
29850	16 mm, 92 N·m*
29851	17 mm, 107 N·m*
29876	18 mm, 128 N·m*
29877	19 mm, 149 N·m*
29852	20 mm, 172 N·m*
29853	21 mm, 198 N·m*
29854	22 mm, 225 N·m*
29855	23 mm, 255 N·m*
29856	24 mm, 287 N·m*
29857	25 mm, 322 N·m*
29858	26 mm, 330 N·m*
29878	27 mm, 330 N·m*
29860	29 mm, 330 N·m*
29861	30 mm, 330 N·m*
29863	32 mm, 330 N·m*
297100	36 mm, 330 N·m*


2	OPEN ENDS IMPERIAL
29701	1/4", 7 N·m*
29702	5/16", 13 N·m*
29703	3/8", 21 N·m*
29704	7/16", 32 N·m*
29705	1/2", 48 N·m*
29706	9/16", 67 N·m*
29707	5/8", 90 N·m*
29708	1 1/16", 118 N·m*
29709	3/4", 150 N·m*
29710	1 5/16", 187 N·m*
29711	7/8", 230 N·m*
29712	1 15/16", 281 N·m*
29713	1", 330 N·m*
29714	1 1/8", 330 N·m*
29715	1 3/8", 330 N·m*
29716	1 7/16", 330 N·m*
29717	1 1/4", 330 N·m*
29718	1 5/8", 330 N·m*

2	RING ENDS METRIC
29881	7 mm, 25 N·m*
29882	8 mm, 35 N·m*
29883	9 mm, 45 N·m*
29884	10 mm, 52 N·m*
29885	11 mm, 73 N·m*
29886	12 mm, 89 N·m*
29887	13 mm, 107 N·m*
29888	14 mm, 128 N·m*
29889	15 mm, 150 N·m*
29890	16 mm, 175 N·m*
29891	17 mm, 201 N·m*
29913	18 mm, 230 N·m*
29914	19 mm, 261 N·m*
29892	20 mm, 294 N·m*
29893	21 mm, 330 N·m*
29894	22 mm, 330 N·m*
29895	23 mm, 330 N·m*
29896	24 mm, 330 N·m*
29915	27 mm, 330 N·m*

2	RING ENDS IMPERIAL
29726	1/4", 25 N·m*
29727	5/16", 35 N·m*
29731	9/16", 170 N·m*
29732	5/8", 226 N·m*
29734	3/4", 305 N·m*
29735	13/16", 330 N·m*
29736	7/8", 330 N·m*
29737	1 1/16", 330 N·m*
29738	1", 330 N·m*
29739	1 5/8", 330 N·m*



2	FLARE ENDS METRIC
29921	7 mm, 7 N·m*
29922	8 mm, 6 N·m*
29923	9 mm, 5 N·m*
29926	12 mm, 13 N·m*
29927	13 mm, 34 N·m*
29929	15 mm, 18 N·m*
29930	16 mm, 66 N·m*
29953	18 mm, 45 N·m*
29954	19 mm, 80 N·m*
29932	20 mm, 60 N·m*
29933	21 mm, 43 N·m*
29934	22 mm, 172 N·m*
29935	23 mm, 153 N·m*
29936	24 mm, 118 N·m*
29955	27 mm, 76 N·m*

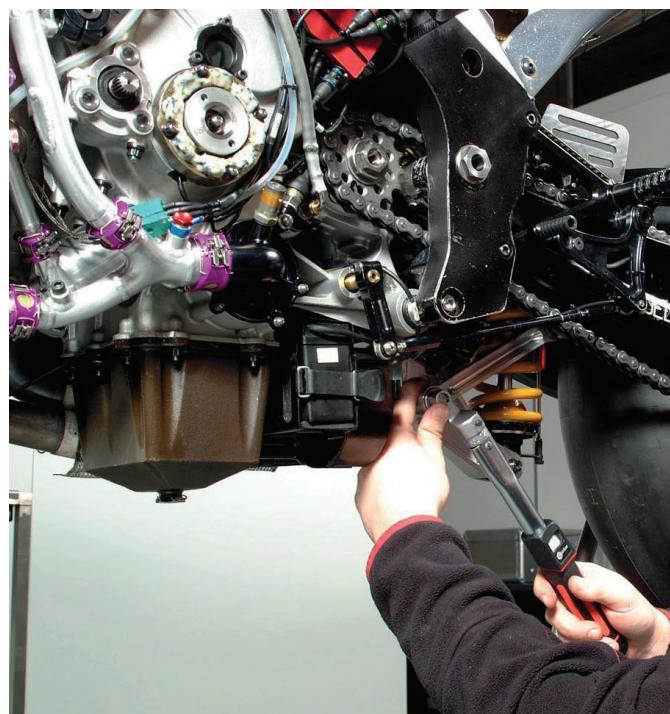

* Max torque values listed are proof torques quoted in BS 192:1982 & BS 3555:1988 (tested on hardened hexagon test stud).



SPANNER END FITTINGS FOR 22 mm TORQUE HANDLES

See below for explanation of part numbers. Other sizes available on request – including bespoke ETO solutions.





2 OPEN ENDS METRIC

29963.22	22 mm Open End, Max 225 N·m
29963.24	24 mm Open End, Max 287 N·m
29963.30	30 mm Open End, Max 536 N·m
29963.32	32 mm Open End, Max 550 N·m
29963.36	36 mm Open End, Max 550 N·m
29963.41	41 mm Open End, Max 550 N·m
29963.46	46 mm Open End, Max 550 N·m



2 RING ENDS METRIC

29960.22	22 mm Ring End, Max 367 N·m
29960.24	24 mm Ring End, Max 450 N·m
29960.27	27 mm Ring End, Max 550 N·m
29960.30	30 mm Ring End, Max 550 N·m
29960.32	32 mm Ring End, Max 550 N·m
29960.36	36 mm Ring End, Max 550 N·m
29960.41	41 mm Ring End, Max 550 N·m
29960.46	46 mm Ring End, Max 550 N·m

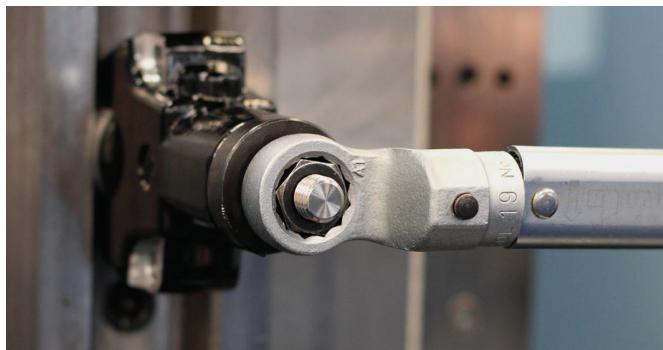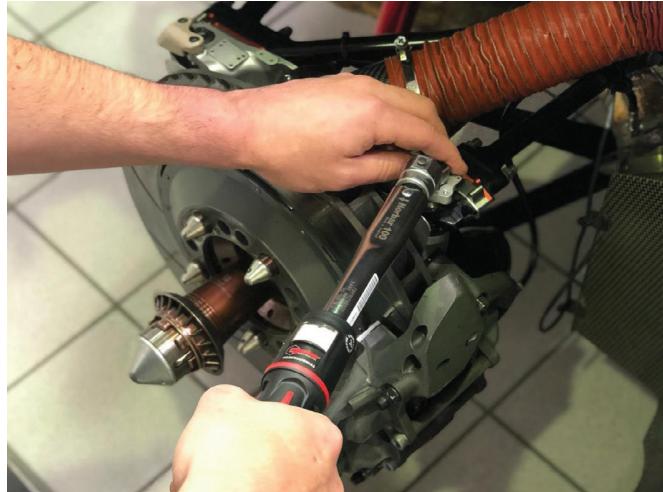

SPIGOT ACCESSORIES



2 16 mm SPIGOT ACCESSORIES

44509	¾" Ratchet with Push-through square
29825	½" Ratchet with Push-through square
44510	½" Ratchet with Push-through square for NorTronic
29828	¾" Fixed Square Drive
29827	½" Fixed Square Drive
29829	¾" Reversible Ratchet Head
29830	½" Reversible Ratchet Head
29832	Blank End Fitting
85242	Blank End Fitting for Open End
11343	Blank End Fitting for Ring End
72000	Spigot Adaptor 16 mm female to 22 mm male



2 22 mm SPIGOT ACCESSORIES

29969	¾" Square Drive Fixed Head
29972	¾" Ratchet with Push-through square
85719	Blank End Fitting for Open End
85720	Blank End Fitting for Ring End






TORQUE WRENCH END FITTINGS

LARGE SPANNER END FITTINGS FOR 16 mm SPIGOT TORQUE HANDLES UP TO 300 N·m

See below for explanation of part numbers. Other sizes available on request – including bespoke ETO solutions.




8 | OPEN OFFSET
METRIC 16 mm
29218.OO.Mxx | 30 - 80 mm



8 | OPEN OFFSET
IMPERIAL 16 mm
29218.OO.Ixx | 1 3/16" - 3 1/4"


8 | OPEN INLINE
METRIC 16 mm
29218.OI.Mxx | 30 - 80 mm

8 | OPEN INLINE
IMPERIAL 16 mm
29218.OI.Ixx | 1 3/16" - 3 1/4"




8 | RING OFFSET
METRIC 16 mm
29218.RO.Mxx | 30 - 80 mm

8 | RING OFFSET
IMPERIAL 16 mm
29218.RO.Ixx | 1 3/16" - 3 1/4"




8 | RING INLINE
METRIC 16 mm
29218.RI.Mxx | 30 - 80 mm

8 | RING INLINE
IMPERIAL 16 mm
29218.RI.Ixx | 1 3/16" - 3 1/4"



8 | FLARE OFFSET
METRIC 16 mm
29218.FO.Mxx | 11 - 80 mm

8 | FLARE OFFSET
IMPERIAL 16 mm
29218.FO.Ixx | 1 3/16" - 3 1/4"



8 | FLARE INLINE
METRIC 16 mm
29218.FI.Mxx | 30 - 80 mm

8 | FLARE INLINE
IMPERIAL 16 mm
29218.FI.Ixx | 1 3/16" - 3 1/4"

METRIC			
Part No	O = Open End R = Ring End F = Flare End	Metric	Across Flats (A/F) mm fixed
29218.00.Mxx			

O = Offset
I = Inline

TORQUE WRENCH END FITTINGS




LARGE SPANNER END FITTINGS FOR 22 mm SPIGOT TORQUE HANDLES UP TO 650 N·m

See below for explanation of part numbers. Other sizes available on request – including bespoke ETO solutions.




8 | OPEN OFFSET METRIC 22 mm
29219.OO.Mxx | 30 - 80 mm



8 | OPEN INLINE IMPERIAL 22 mm
29219.OO.Ixx | 1 3/16" - 3 1/4"


8 | OPEN INLINE METRIC 22 mm
29219.OI.Mxx | 30 - 80 mm

8 | OPEN INLINE IMPERIAL 22 mm
29219.OI.Ixx | 1 3/16" - 3 1/4"




8 | RING OFFSET METRIC 22 mm
29219.RO.Mxx | 30 - 80 mm

8 | RING OFFSET IMPERIAL 22 mm
29219.RO.Ixx | 1 3/16" - 3 1/4"




8 | RING INLINE METRIC 22 mm
29219.RI.Mxx | 30 - 80 mm

8 | RING INLINE IMPERIAL 22 mm
29219.RI.Ixx | 1 3/16" - 3 1/4"



8 | FLARE OFFSET METRIC 22 mm
29219.FO.Mxx | 30 - 80 mm

8 | FLARE OFFSET IMPERIAL 22 mm
29219.FO.Ixx | 1 3/16" - 3 1/4"



8 | FLARE INLINE METRIC 22 mm
29219.FI.Mxx | 30 - 80 mm

8 | FLARE INLINE IMPERIAL 22 mm
29219.FI.Ixx | 1 3/16" - 3 1/4"

IMPERIAL

O = Open End Imperial
R = Ring End
F = Flare End

29218.FI.IXX

O = Offset
I = Inline

(Please use the table on the right)*
Imperial code

IMPERIAL A/F	CODE	IMPERIAL A/F	CODE	IMPERIAL A/F	CODE
1 3/16"	19	1 15/16"	31	2 11/16"	43
1 1/4"	20	2"	32	2 3/4"	44
1 5/16"	21	2 1/16"	33	2 13/16"	45
1 3/8"	22	2 1/8"	34	2 7/8"	46
1 7/16"	23	2 3/16"	35	2 15/16"	47
1 1/2"	24	2 1/4"	36	3"	48
1 9/16"	25	2 5/16"	37	3 1/16"	49
1 5/8"	26	2 3/8"	38	3 1/8"	50
1 11/16"	27	2 7/16"	39	3 3/16"	51
1 3/4"	28	2 1/2"	40	3 1/4"	52
1 13/16"	29	2 9/16"	41		
1 7/8"	30	2 5/8"	42		

*Example: 1 3/8" open inline for 22 mm Spigot = 29219.OI.I30