

80
YEARS
OF TORQUE
INNOVATION

EXPERTS BY CHOICE



DRILCO



GENERIC

	Accuracy (%)		Torque & Angle		Digital Display
	Single Scale		Dual Scale		Multi Scale
	Calibration Certificate		UKAS Accredited Certification		IP Rated
	Bluetooth Enabled		Case Included		

SCREWDRIVERS & TORQUE WRENCHES

	Ratchet		Torque Handle		Fixed
	Adjustment Lock		Declaration of Conformance		Calibration Certificate
	1/4" Hex Bit Holder				

MANUAL TORQUE MULTIPLIERS

	Adjustable Reaction		Anti Wind-up Ratchet		
--	---------------------	--	----------------------	--	--

POWERED TORQUE TOOLS

	Adjustable Reaction		2 Speed		Air Consumption - litres/sec
	Lifting Attachment		Bi-Directional		

TORQUE MEASUREMENT INSTRUMENTS

	Multi Transducers		Back-up Data		
--	-------------------	--	--------------	--	--

HARSH ENVIRONMENT INSTRUMENTS

	Multi Transducers				
--	-------------------	--	--	--	--

ULTRASONIC MEASUREMENT

	Back-up Data				
--	--------------	--	--	--	--

CUSTOMER RELATIONS

CONTACT DETAILS

New Sales

Direct Tel +44 (0)1295 753600

Email sales@norbar.com

After Sales Service

Tel +44 (0)1295 753635

Email service@norbar.com

Norbar Torque Tools Ltd
Wildmere Road, Banbury
Oxfordshire, OX16 3JU
UNITED KINGDOM
www.norbar.com

OFFICE OPENING HOURS

Monday - Thursday

07:30 - 17:00

Friday

07:30 - 16:15

NORBAR SOCIAL MEDIA



Norbar Torque Tools Ltd



Norbar Torque Tools




Norbar Torque Tools Ltd





HANDTORQUE® MULTIPLIERS

DRILCO

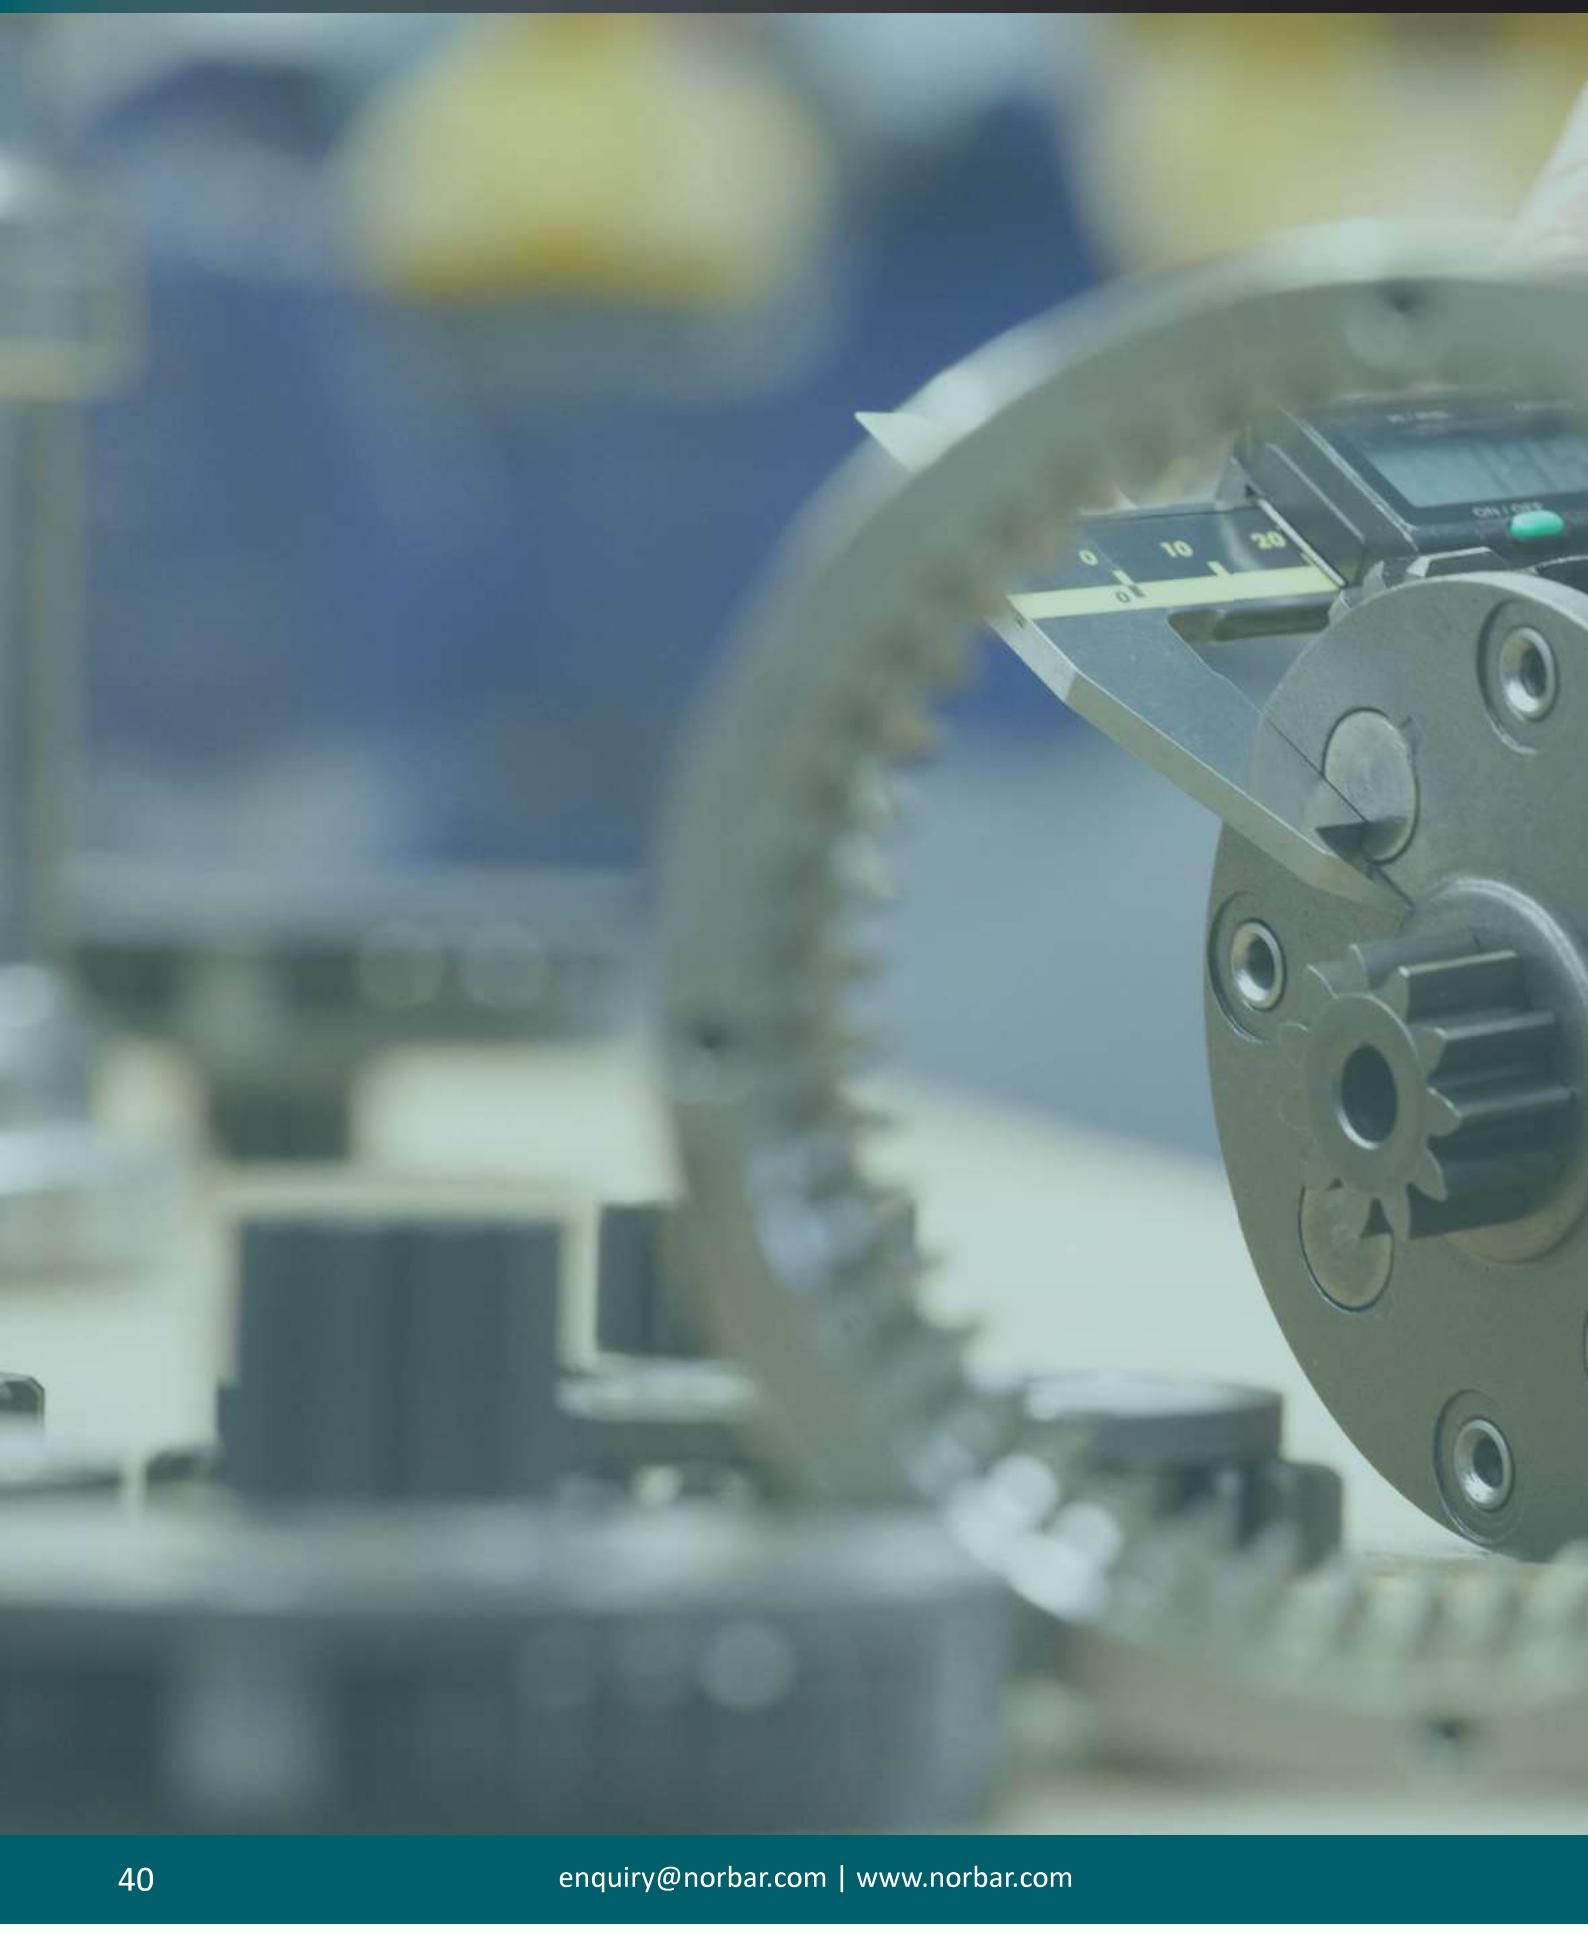



HANDTORQUE® TORQUE MULTIPLIERS

HandTorque® Torque Multipliers	42
Anti Wind-Up Ratchets (AWUR)	43
HandTorque® HT3-1000	44
HandTorque® HT3 Series	44
HandTorque® HT4 Series	45
HandTorque® Standard Series	46
UKAS Accredited Calibration Certification	47
HandTorque® Compact Series	48

Torque wrench design offers just two solutions to the challenge of applying higher torques: either the load at the handle must be higher or the lever length must be greater. Clearly there are practical and safety limits to both of these solutions.

Norbar's solution is to use a compact, epicyclic gearbox called a HandTorque® multiplier to accurately multiply the input torque provided by a torque wrench by a fixed ratio.





HANDTORQUE® TORQUE MULTIPLIERS

What is a Torque Multiplier?


A torque multiplier is a device that increases the torque that can be applied by an operator. This is because the power output cannot exceed the power input, the number of output revolutions will be lower than the number of input revolutions (Torque x rpm = Power).

How HandTorque® Torque Multipliers Work

HandTorque® multipliers incorporate an 'epicyclic' or 'planetary' gear train having one or more stages. Each stage of gearing increases the torque applied, allowing Norbar to offer multipliers typically in ratios of 5:1, 27:1 and 135:1.

In the planetary gear system, torque is applied to the input gear or 'sun' gear. Three or four planet gears whose teeth are engaged with the 'sun' gear therefore rotate. The outside casing of the multiplier, or 'annulus' is also engaged with the planet gear teeth, and would normally rotate in the opposite direction to the 'sun' gear. A reaction arm prevents the annulus from rotating, and this causes the planet gears to orbit around the 'sun'. The planet gears are held in a 'planetary' carrier which also holds the output square drive, therefore as the planet gears orbit around the sun gear, the carrier and so the square drive turns. Without the reaction arm to keep the annulus stationary, the output square will not apply torque.

No gearbox is 100% efficient, and so the velocity ratio (the number of turns that the input has to make to achieve one revolution of the output) is not the same as the torque multiplication ratio. Norbar multipliers are engineered such that each gear stage typically has a nominal 5:1 ratio, this means a velocity ratio of typically 5.45:1 which results in a true torque multiplication factor of 5.2:1.

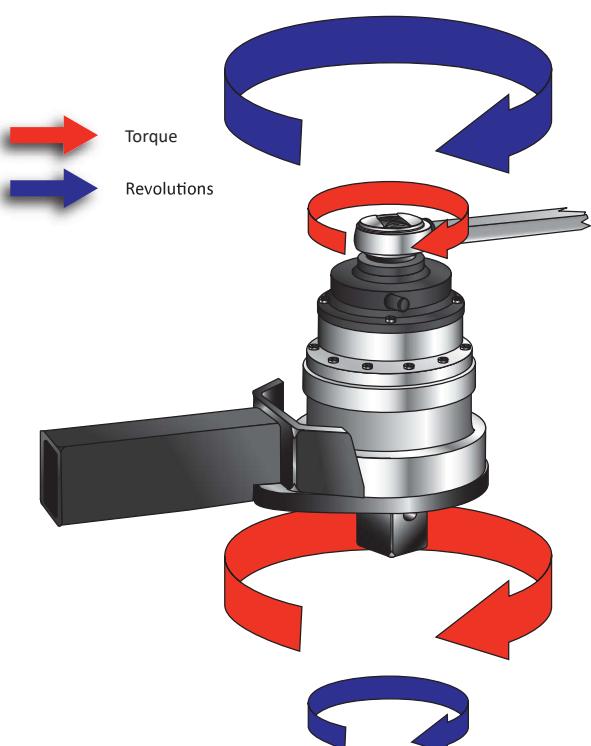

Why use a HandTorque® Multiplier?


- **Safety** – use of long levers can be dangerous. Torque multipliers allow for a reduction in the lever length or operator effort
- **Space limitation** – the use of a long lever may be impossible due to the available space
- **Accuracy** – torque will be applied most accurately when it is applied smoothly and slowly. Torque multipliers enable this by removing much of the physical effort from the tightening task

Advantages of the Norbar HandTorque® System

Norbar gearboxes are built to an extremely high standard of precision. All gears rotate on needle roller bearings about hardened and ground journal pins. As a result, Norbar HandTorques can be relied upon to have a mean torque multiplication accuracy of $\pm 4\%$, taking the uncertainty out of high torque tightening.

Summary of Norbar torque multiplier advantages:

- The ratio stated is the mean torque multiplication factor
- No correction charts are needed to determine torque output
- Strong, safe Anti Wind-Up Ratchet available on most models for safe and comfortable operation
- A wide range of alternative reaction styles are available making the HandTorque® adaptable to many applications
- Electronic torque transducers are available on most models for precise torque control
- Compact Series are supplied with their own unique calibration certificate allowing the accurate calculation of input torque for critical applications

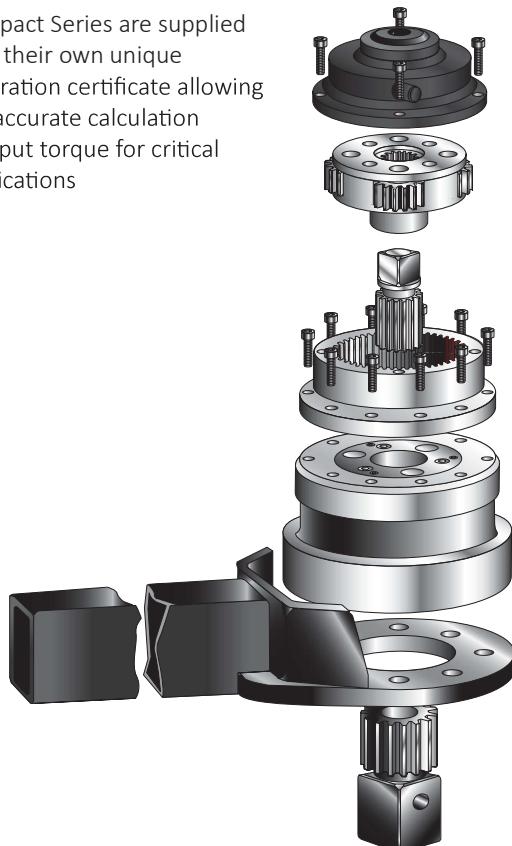




ANTI WIND-UP RATCHETS (AWUR)




Norbar Anti Wind-Up Ratchets (AWUR)

Most multipliers with ratios of 15:1 and over are fitted with an Anti Wind-Up Ratchet. The multiplier can be thought of as a spring which must be fully wound before any tightening/untightening work can be applied to the bolt.

The AWUR ensures that the 'spring' stays wound and that any further torque input to the multiplier is applied directly to the bolt.

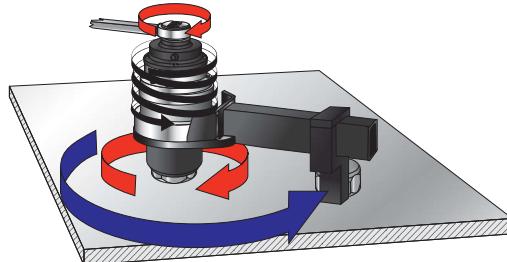

Multiplier behaves like a very stiff 'spring'

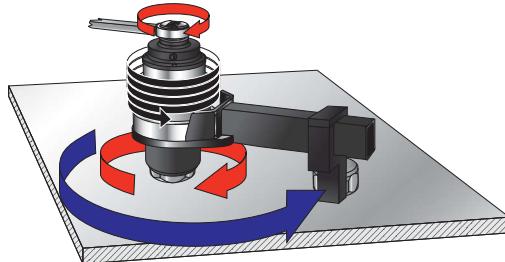


Multiplier will achieve maximum torque only after the 'spring' has been taken up

→ Torque → Reaction Force

AWUR benefits include:

1. The torque input device cannot fly backwards against the direction of operation if it is suddenly released.
2. Without an Anti Wind-Up Ratchet, it will often be necessary to continue to make 360° sweeps with the torque input device otherwise the multiplier will 'unwind'. However, obstructions will often make this impossible (as demonstrated in this example).

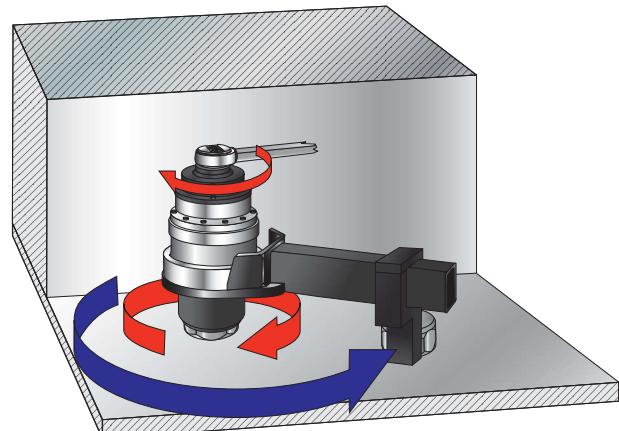

AWUR set to counter-clockwise operation



AWUR set to neutral



AWUR set to clockwise operation



HANDTORQUE® HT3-1000



- 5:1 nominal torque multiplication, reaction dependant. Mean ratio with cranked foot is 4.8:1; with straight reaction is 4.9:1
- $\pm 4\%$ mean torque multiplication accuracy
- Small and compact design
- Updated aesthetics with tough silver metallic powder coat
- Supplied with 2 reaction bar styles for maximum versatility
- Quick-change cranked reaction with improved flexibility allowing reaction in 8 orientations
- Robust construction means minimal maintenance and long life
- If calibration is required, a UKAS accredited calibration certificate may be ordered (at extra cost)

2 HT3-1000

180260 HT3-1000, 1,000 N·m Kit, $\frac{1}{2}$ " input x $\frac{3}{4}$ " output

HANDTORQUE® HT3 SERIES



- 5:1 mean torque multiplication, accuracy $\pm 4\%$
- Supplied with two reaction bar styles for maximum versatility
- Robust construction means minimal maintenance and long life
- Supplied in a carry case, the Highwayman is ideal for inclusion in the heavy vehicle tool kit
- 1,300 N·m version has a spare $\frac{3}{4}$ " output square included in the kit
- Multiplier head only (no reaction bars or plastic box) also available 1,300 N·m version, part no. 17218
- 2,700 N·m version, part no. 17219
- If calibration is required, a UKAS accredited calibration certificate may be ordered (at extra cost)



2 HT3 SERIES

17220 HT3 1,300 N·m Kit, $\frac{1}{2}$ " input x $\frac{3}{4}$ " output17221 HT3 2,700 N·m Kit, $\frac{3}{4}$ " input x 1" output

Kits are supplied in a carry case with a reaction bar and a reaction foot (17220 also contains a spare $\frac{3}{4}$ " sq. dr.)

Model	HT3-1000	HT3 1,300 N·m	HT3 2,700 N·m
Part Number	180260	17220	17221
Mean Multiplication Ratio	Nominal	5:1	5:1
	With Cranked Reaction	4.8:1	4.75:1
	With Straight Reaction	4.9:1	5:1
Dimensions (mm)	$\varnothing D$	65	108
	H1	63	103
	H2	21	44
	L	273	398
	R1	55	77
	R2 min.	83	140
	R2 max.	143	212
	R3 max.	240	344
Tool Weight (kg)	1.5	3.8	3.8
Reaction Weight (kg)	Cranked	0.5	1.36
	Straight	0.7	1.1

HT3 1300/2700
on right shown in
comparison with
HT3 1000

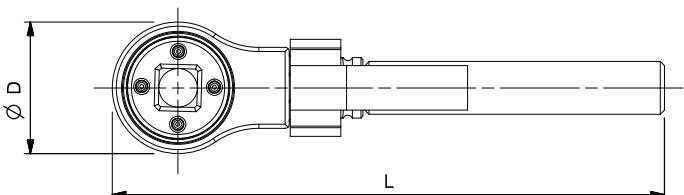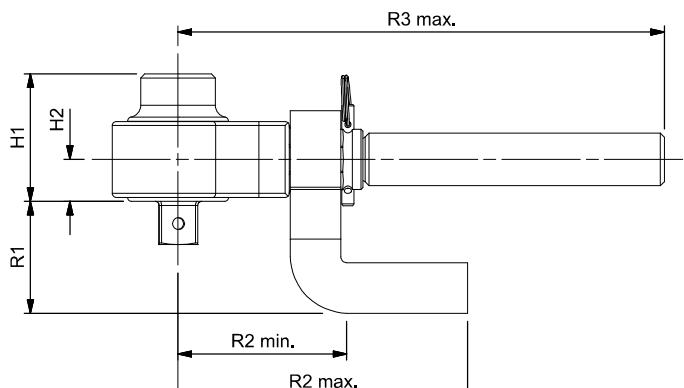



HANDTORQUE® HT4 SERIES




- Robust construction means minimal maintenance and long life
- Mean 15.5:1 (3,000 N·m) or 26:1 (4,500 N·m) torque multiplication, accuracy $\pm 4\%$
- High ratios allow the use of a small torque wrench
- Supplied in carrying case with replacement square drive
- Anti Wind-Up Ratchet fitted to allow safer and more practical operation
- Angle protractor for easy torque and angle tightening
- If calibration is required, a UKAS accredited calibration certificate may be ordered (at extra cost)



4	HT4 SERIES
17022	HT4 AWUR, 3,000 N·m, $\frac{1}{2}$ " in 1" out
17021	HT4 AWUR, 4,500 N·m, $\frac{1}{2}$ " in 1" out



Model	HT4/15.5 AWUR	HT4/26 AWUR
Part Number	17022	17021
Mean Multiplication Ratio	15.5:1	26:1
Dimensions (mm)	ØD	108
	H1	131
	H2	55
	L	498
	R max.	444
Tool Weight (kg)	6.1	7.0
Reaction Weight (kg)	1.9	1.9

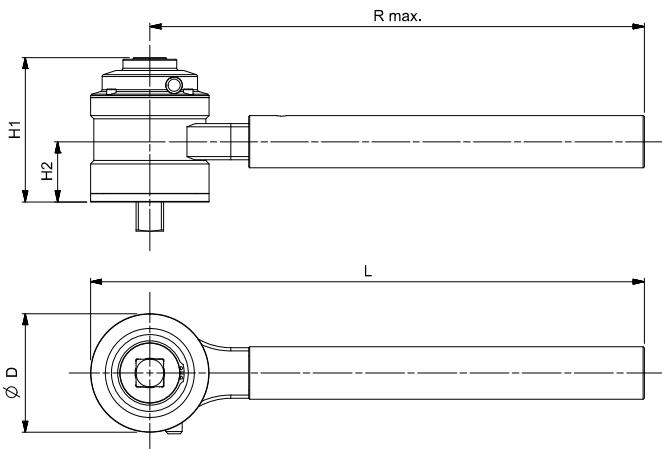



HANDTORQUE® STANDARD SERIES



- Mean torque multiplication accuracy $\pm 4\%$
- High ratios allow the use of a small torque wrench, multipliers can be used where access is limited
- Anti Wind-Up Ratchet available on high ratio models
- Other reaction styles can be designed to suit specific applications
- Electronic torque transducers can be fitted for precise torque monitoring, see pages 93-95
- Other models available up to 300,000 N·m
- If calibration is required, a UKAS accredited calibration certificate may be ordered (at extra cost) up to 6,000 N·m

4	STANDARD SERIES
16010	HT 1/5.2, 1,700 N·m, $\frac{1}{2}$ " in $\frac{3}{4}$ " out
16012.HD	HT 2/5.2, 1,700 N·m, $\frac{3}{4}$ " in 1" out
16034.HD	HT 2/27, 1,700 N·m, $\frac{1}{2}$ " in 1" out
16089.HD	HT 2/27 AWUR, 1,700 N·m, $\frac{1}{2}$ " in 1" out
16014	HT 5/5.2, 3,400 N·m, $\frac{3}{4}$ " in 1" out
16028	HT 5/27, 3,400 N·m, $\frac{1}{2}$ " in 1" out
16090	HT 5/27 AWUR, 3,400 N·m, $\frac{1}{2}$ " in 1" out
16016	HT 6/5.2, 3,400 N·m, $\frac{3}{4}$ " in 1 $\frac{1}{2}$ " out
16024	HT 6/27, 3,400 N·m, $\frac{1}{2}$ " in 1 $\frac{1}{2}$ " out
16092	HT 6/27 AWUR, 3,400 N·m, $\frac{1}{2}$ " in 1 $\frac{1}{2}$ " out
16093	HT 6/135 AWUR, 3,400 N·m, $\frac{1}{2}$ " in 1 $\frac{1}{2}$ " out
16067	HT 7/5.2, 6,000 N·m, $\frac{3}{4}$ " in 1 $\frac{1}{2}$ " out
16018	HT 7/27, 6,000 N·m, $\frac{1}{2}$ " in 1 $\frac{1}{2}$ " out
16065	HT 7/27 AWUR, 6,000 N·m, $\frac{1}{2}$ " in 1 $\frac{1}{2}$ " out
16068	HT 7/135 AWUR, 6,000 N·m, $\frac{1}{2}$ " in 1 $\frac{1}{2}$ " out
16059	HT 9/27, 9,500 N·m, $\frac{3}{4}$ " in 1 $\frac{1}{2}$ " out
16070	HT 9/27 AWUR, 9,500 N·m, $\frac{3}{4}$ " in 1 $\frac{1}{2}$ " out
16071	HT 9/135 AWUR, 9,500 N·m, $\frac{1}{2}$ " in 1 $\frac{1}{2}$ " out
16082	HT 11/27, 20,000 N·m, $\frac{3}{4}$ " in 2 $\frac{1}{2}$ " out
16049	HT 11/135 AWUR, 20,000 N·m, $\frac{1}{2}$ " in 2 $\frac{1}{2}$ " out
16053	HT 13/135 AWUR, 47,500 N·m, $\frac{1}{2}$ " in 2 $\frac{1}{2}$ " out

Other gear ratios may be available upon request.

If AWUR is not required please enquire for part number.

HT 13/135 fitted with weld prepared reaction ring as standard.

AWUR = Anti Wind-Up Ratchet. See page 43.

NOTE: Model name does not reflect multiplication ratios, see mean multiplication ratios below.


For spares kits for Norbar multipliers, please see page 134.

Model	HT 1/5.2	HT 2/5.2	HT 2/27	HT 2/27 AWUR	HT 5/5.2	HT 5/27	HT 5/27 AWUR	HT 6/5.2	HT 6/27	HT 6/27 AWUR	HT 6/135 AWUR
Part Number	16010	16012.HD	16034.HD	16089.HD	16014	16028	16090	16016	16024	16092	16093
Mean Multiplication Ratio	5.2:1	5.2:1	27:1	27:1	5.2:1	27:1	27:1	5.2:1	27:1	27:1	135:1
Dimensions (mm)	ØD	108	108	108	119	119	119	119	119	119	119
	H	83	98	98	106	127	132	106	128	134	159
	L	303	303	303	355	355	355	355	355	355	355
	R1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	R2 min.	83	83	83	86	86	86	86	86	86	86
	R2 max.	216	216	216	263	263	263	263	263	263	263
Tool Weight (kg)	3.0	3.2	4.6	6.7	4.7	6.4	7.5	4.7	6.4	7.5	9.0
Reaction Weight (kg)	2.2	2.2	2.2	2.2	2.5	2.5	2.5	2.5	2.5	2.5	2.5


Model	HT 7/5.2	HT 7/27	HT 7/27 AWUR	HT 7/135 AWUR	HT 9/27	HT 9/27 AWUR	HT 9/135 AWUR	HT 11/27	HT 11/135 AWUR	HT 13/135 AWUR
Part Number	16067	16018	16065	16068	16059	16070	16071	16082	16049	16053
Mean Multiplication Ratio	5.2:1	27:1	27:1	135:1	27:1	27:1	135:1	27:1	135:1	135:1
Dimensions (mm)	ØD	144	144	144	184	184	184	212	212	315
	H	136	157	162	188	166	162	182	208	235
	L	423	423	423	448	448	448	609	609	341
	R1	84	84	84	84	84	84	N/A	N/A	N/A
	R2 min.	150	150	150	175	175	175	320	320	N/A
	R2 max.	331	331	331	351	351	351	500	500	N/A
Tool Weight (kg)	8.1	9.6	10.7	12.2	16.3	17.4	18.9	31.7	32.1	95.2
Reaction Weight (kg)	6.3	6.3	6.3	6.3	8.3	8.3	8.3	13.3	13.3	6.9




HANDTORQUE® STANDARD SERIES

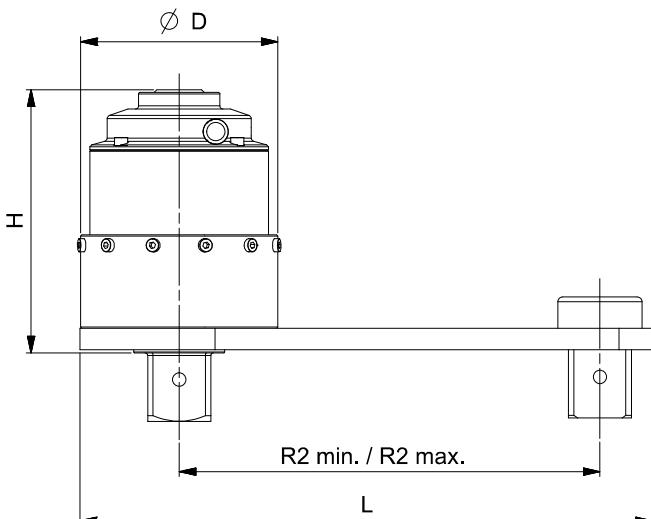


HT 1 - HT 6

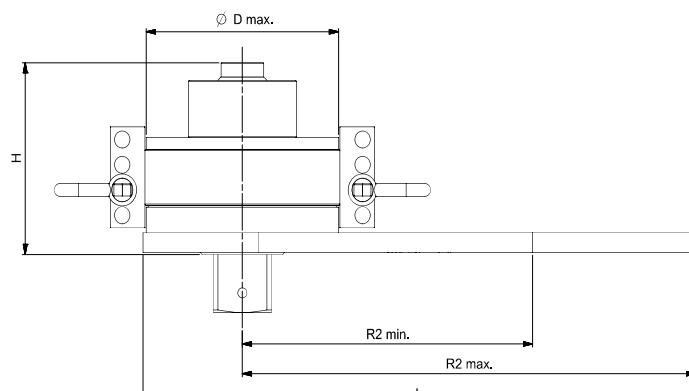

HT 11

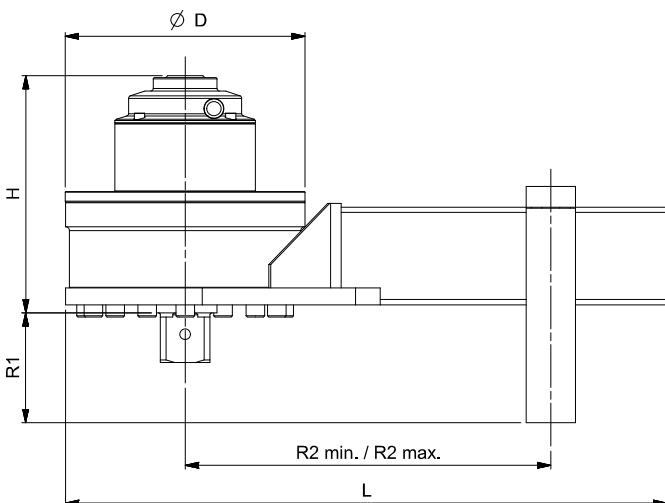

HT 7 - HT 9

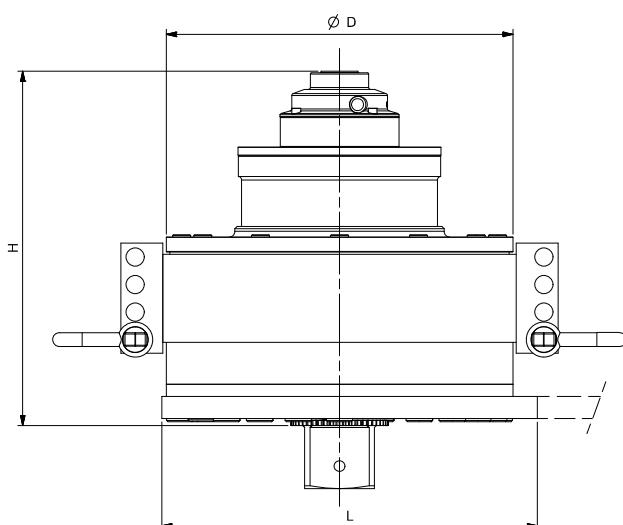

HT 13

UKAS ACCREDITED CALIBRATION CERTIFICATION

The part numbers shown below are for 'As Found', for new manual torque multiplying gearboxes up to the maximum capacity shown.

12	ONE DIRECTION
HTCC2.CW	Up to 6,000 N·m / 5,000 lbf·ft

12	TWO DIRECTIONS
HTCC2.CW+CCW	Up to 6,000 N·m / 5,000 lbf·ft





HANDTORQUE® COMPACT SERIES




HT-72/27 (181450)



- Compact dimensions allow excellent access to applications and easy, safe handling
- Lightweight for torque capacity
- Supplied as standard with a steel reaction arm. Other options are available on request, including customised reactions
- Mean torque multiplication accuracy $\pm 4\%$
- Robust, 48 tooth Anti Wind-Up Ratchet (AWUR) contains the forces generated during tightening for safe and easy operation
- Each multiplier is supplied with its own unique traceable calibration certificate allowing the accurate calculation of input torque for critical applications
- If you order a UKAS accredited calibration certificate (available at extra cost), this certificate will be provided in place of the traceable calibration certificate.

4 COMPACT SERIES

181440	HT-52/4.7, 1,000 N·m, $\frac{1}{2}$ " in $\frac{3}{4}$ " out
181441	HT-52/22.2, 1,000 N·m, $\frac{3}{8}$ " in $\frac{3}{4}$ " out
181442	HT-52/22.2, 1,000 N·m, $\frac{1}{2}$ " in $\frac{3}{4}$ " out
181443	HT-52/22.2 AWUR, 1,000 N·m, $\frac{3}{8}$ " in $\frac{3}{4}$ " out
181444	HT-52/22.2 AWUR, 1,000 N·m, $\frac{1}{2}$ " in $\frac{3}{4}$ " out
181445	HT-52/22.2 AWUR, 1,000 N·m, $\frac{3}{8}$ " in 1" out
181446	HT-52/22.2 AWUR, 1,000 N·m, $\frac{1}{2}$ " in 1" out
181447	HT-72/5.2, 1,500 N·m, $\frac{1}{2}$ " in 1" out
181448	HT-72/5.2, 1,000 N·m, $\frac{3}{4}$ " in $\frac{3}{4}$ " out
181449	HT-72/5.2, 2,000 N·m, $\frac{3}{4}$ " in 1" out
181450	HT-72/27, 2,000 N·m, $\frac{1}{2}$ " in 1" out
181451	HT-72/27 AWUR, 2,000 N·m, $\frac{1}{2}$ " in 1" out
181452	HT-92/25 AWUR, 4,000 N·m, $\frac{1}{2}$ " in 1" out
181453	HT-119/25.5 AWUR, 7,000 N·m, $\frac{1}{2}$ " in $\frac{1}{2}$ " out

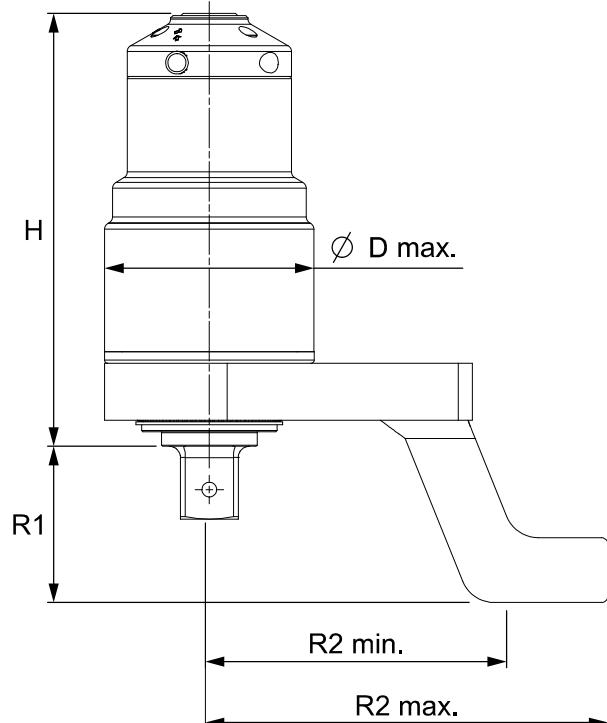

Model	HT-52/4.7	HT-52/22.2	HT-52/22.2 AWUR	HT-72/5.2	HT-72/5.2	HT-72/5.2	HT-72/27	HT-72/27 AWUR	HT-92/25 AWUR	HT-119/25.5 AWUR
Part Number	181440	181441 181442	181443 181444 181445 181446	181447	181448	181449	181450	181451	181452	181453
Mean Multiplication Ratio	4.7:1	22.2:1	22.2:1	5.2:1	5.2:1	5.2:1	27:1	27:1	25:1	25.5:1
Dimensions (mm)	ϕD max.	52	52	52	72	72	72	72	92	119
	H	91	116	130	117	122	117	132	150	190
	R1	58	58	58	74	69	74	74	69	91
	R2 min.	71	71	71	112	112	112	112	115	152
	R2 max.	131	131	131	165	165	165	165	175	212
Tool Weight (kg)	1.0	1.3	1.4	2.5	2.5	2.6	2.9	3.2	5.4	9.3
Reaction Weight (kg)	0.9	0.9	0.9	1.4	1.4	1.4	1.4	1.4	2.5	4.0